

43-07-00

A

ASSISTANT COMMISSIONER OF PATENTS AND TRADEMARKS
Washington, DC 20231

PATENT
Date: March 6, 2000
File No. 1924.63673

Sir:

Transmitted herewith for filing is the patent application of

Inventor(s): Yu Minakuchi, Mitsuru Osawa,
Takayuki Yamamoto

I hereby certify that this paper is being deposited with the United States Postal Service as Express Mail in an envelope addressed to: Asst. Comm. for Patents, Washington, D.C. 20231, on this date.

03/06/00
Date

Express Mail Label No.: EL409491170US

For: INFORMATION DISTRIBUTION CONTROL
SYSTEM, INFORMATION DISTRIBUTION CONTROL
METHOD, COMPUTER READABLE RECORDING
MEDIUM FOR RECORDING INFORMATION
DISTRIBUTION CONTROL PROGRAM, INFORMATION
REPRODUCTION APPARATUS, AND COMPUTER
READABLE RECORDING MEDIUM FOR RECORDING
INFORMATION REPRODUCTION CONTROL PROGRAM

Enclosed are:

- (X) 84 pages of specification, including 10 claims and an abstract.
- (X) an executed oath or declaration, with power of attorney.
- () an unexecuted oath or declaration, with power of attorney.
- () sheet(s) of informal drawing(s).
- (X) 14 sheet(s) of formal drawings(s).
- (X) Assignment(s) of the invention to FUJITSU LIMITED.
- (X) Assignment Form Cover Sheet.
- (X) A check in the amount of \$ 40.00 to cover the fee for recording the assignment(s) is enclosed.
- (X) Information Disclosure Statement.
- (X) Form PTO-1449 and cited references.
- () Associate power of attorney.
- (X) Priority Document.


Fee Calculation For Claims As Filed

a) Basic Fee					\$ 690.00
b) Independent Claims	<u>7</u>	-	<u>3</u>	=	<u>4</u> x \$ 78.00 = \$ <u>312.00</u>
c) Total Claims	<u>10</u>	-	<u>20</u>	=	<u> </u> x \$ 18.00 = \$ <u> </u>
d) Fee for Multiple Claims					\$260.00 = \$ <u> </u>
Total Filing Fee					\$ <u>1,002.00</u>

- () Statement(s) of Status as Small Entity, reducing Filing Fee by half to \$
- (X) A check in the amount of \$ 1,002.00 to cover the filing fee is enclosed.
- (X) The Commissioner is hereby authorized to charge any additional fees which may be required to this application under 37 C.F.R. §§1.16-1.17, or credit any overpayment, to Deposit Account No. 07-2069. Should no proper payment be enclosed herewith, as by a check being in the wrong amount, unsigned, post-dated, otherwise improper or informal or even entirely missing, the Commissioner is authorized to charge the unpaid amount to Deposit Account No. 07-2069. A duplicate copy of this sheet is enclosed.

Suite 8660 - Sears Tower
233 S. Wacker Drive
Chicago, Illinois 60606
(312) 993-0080

GREER, BURNS & CRAIN, LTD.

By: 
Patrick G. Burns
Registration No. 29,367

03/06/00
JCS11 U.S. PTO

JCS11 U.S. PTO
09/15/9526
03/06/00

03/06/00

INFORMATION DISTRIBUTION CONTROL SYSTEM, INFORMATION
DISTRIBUTION CONTROL METHOD, COMPUTER READABLE
RECORDING MEDIUM FOR RECORDING INFORMATION DISTRIBUTION
CONTROL PROGRAM, INFORMATION REPRODUCTION APPARATUS,
5 AND COMPUTER READABLE RECORDING MEDIUM FOR RECORDING
INFORMATION REPRODUCTION CONTROL PROGRAM

FIELD OF THE INVENTION

00515526-030600

The present invention relates to an information
10 distribution control system, an information distribution
control method, a computer readable recording medium for
recording an information distribution control program, an
information reproduction apparatus and a computer readable
recording medium for recording an information reproduction
15 control program used for distribution of stream information
(animation data and audio data) capable of real time
reproduction. More particularly, this invention relates to an
information distribution control system, an information
distribution control method, a computer readable recording
20 medium for recording an information distribution control
program, an information reproduction apparatus and a computer
readable recording medium for recording an information
reproduction control program capable of providing an
information distribution service with a high added value.

25

1

I hereby certify that this paper is being deposited with the
United States Postal Service as Express Mail in an envelope
addressed to: Asst. Comm. for Patents, Washington, D.C.
20231, on this date.

03-06-00
Date

Express Mail Label No.: EL409491170US

BACKGROUND OF THE INVENTION

In recent years, an information distribution system for broadcasting live a lecture meeting or a concert in the same manner as the conventional TV broadcasting has been closely watched as the result of extension of internet and intranet. In this system, the stream information capable of real time reproduction by clients is generated from the image data and the audio data by the streaming technique, and this stream information is distributed to a plurality of clients at a time through a network. In keeping with this trend of multimedia, the providers of this information distribution service are seeking a service with a higher added value by carrying the scheme a step forward from the mere distribution of the stream information.

In the conventional internet or intranet environment, the use of an information distribution system for distributing the proceeding of a lecture meeting or a concert to receivers in real time as stream information (animation data and audio data) is extending. This information distribution system comprises a video camera and a microphone installed in the place of a lecture meeting or a concert hall, and a stream server for generating the stream information (contents information) capable of real time reproduction from the image data and the audio data produced by the video camera and the microphone, using the streaming technique, and distributing this stream

information to a plurality of clients through a network.

A plurality of the clients receive the stream information and reproduce them in real time. This information distribution system, in which clients, if connected to the internet, can have the distribution of the stream information, has recently been closely watched.

The conventional information distribution system, as described above, is a system of broadcast type specialized in the distribution of the stream information capable of real time reproduction, and remains the same as the existing TV broadcast system in the sense that the contents information is reproduced in real time.

In the conventional information distribution system, as compared with the existing TV broadcast system, the access charge paid to the service provider for using the network is much higher than the charge paid for enjoying the TV broadcasting. On the contrary, the cost of the TV broadcast system is much lower than the access charge paid. As far as the service cost is concerned, therefore, the conventional information distribution system is still no match for the existing TV broadcasting system.

In view of this, the provider of the information distribution service using the information distribution system is in search for a high value-added service but not the mere distribution of the stream information. Under the

circumstances, however, no service having a decisive factor capable of competing with the existing TV broadcasting system has yet to be offered.

5 SUMMARY OF THE INVENTION

It is an object of this invention to provide an information distribution control system, an information distribution control method, a computer readable recording medium for recording an information distribution control program, an information reproduction apparatus and a computer readable recording medium for recording an information reproduction control program capable of providing an information distribution service with a high added value.

In order to achieve the object described above, according to one aspect of the present invention, there is provided an information distribution control system comprising a first time information addition control unit which adds the first time information to the stream information capable of real time reproduction distributed from a stream information distribution apparatus to receivers, a second time information addition control unit which adds the second time information to the storage-type information distributed to the receivers, and a sync reproduction control unit which controls the receivers in such a manner as to reproduce the stream information and the storage-type information in temporal

synchronism with each other based on the first time information and the second time information.

According to the above invention, the first time information is added to the stream information under the control of the first time information addition control unit, and the second time information is added to the storage-type information under the control of the second time information addition control unit. The stream information and the storage-type information are received by the receivers. In each of the receivers, the stream information and the storage-type information are reproduced in temporal synchronism with each other based on the first time information and the second time information under the control of the sync reproduction control unit.

As described above, both the stream information and the storage-type information are synchronously reproduced in the receivers, and therefore, as compared with the conventional case where the only the stream information is reproduced in real time, an information distribution service with a higher added value can be offered.

Further, the storage-type information is held in the stream information distribution apparatus, the second time information is added to the storage-type information by the second time information addition control unit, and the stream information distribution apparatus distributes the stream

information with the first time information added thereto and the storage-type information with the second time information added thereto to the receivers through a network.

According to the above invention, the first time
5 information is added to the stream information in the stream information distribution control apparatus under the control of the first time information distribution addition control unit and the second time information addition control unit, and the second time information is added to the storage-type
10 information. The stream information and the storage-type information are received by the receivers. In each of the receivers, the stream information and the storage-type information are synchronously reproduced in temporal synchronism with each other based on the first time information
15 and the second time information under the control of the sync reproduction control unit.

As described above, the storage-type information is held in the stream information distribution apparatus so that the stream information and the storage-type information are
20 distributed from the same stream information distribution apparatus, and therefore the effect of transmission delay can be reduced.

Further, there is provided a download unit which downloads the storage-type information in advance to the stream
25 information distribution apparatus.

0510526.030600

According to the above invention, the storage-type information is downloaded in advance to the stream information distribution apparatus by the download unit. In the stream information distribution control apparatus, the first time
5 information is added to the stream information and the second time information is added to the storage-type information under the control of the first time information addition control unit and the second time information addition control unit. The stream information and the storage-type information are
10 received by each of the respective receivers. In each of the receivers, the stream information and the storage-type information are synchronously reproduced in temporal synchronism with each other based on the first time information and the second time information under the control of the sync
15 reproduction control unit.

As described above, the storage-type information is downloaded in advance to the stream information distribution apparatus so that the stream information and the storage-type information are distributed from the same stream information
20 distribution apparatus, and therefore the effect of the transmission delay can be reduced.

According to another aspect of the present invention, there is provided an information distribution control system comprising a time information addition control unit which adds
25 the time information to the stream information capable of real

time reproduction distributed to the receivers from the stream information distribution apparatus, and a sync reproduction control unit which controls the receivers in such a manner as to reproduce the stream information and the storage-type information held in the receivers in temporal synchronism with each other based on the time information.

According to the above invention, the time information is added to the stream information under the control of the time information addition control unit, after which the stream information is received by the receivers. In each of the receivers, the stream information received and the storage-type information held are synchronously reproduced in temporal synchronism with each other based on the time information under the control of the sync reproduction control unit.

As described above, the stream information and the storage-type information are both synchronously reproduced in the receiver, and therefore as compared with the conventional case in which the stream information alone is reproduced in real time, an information distribution service with a high added value is offered. Further, the storage-type information is held in advance in the receivers, and therefore the storage-type information is not required to be transmitted, thereby eliminating the effect of the transmission delay.

Further, there is provided a download unit which downloads the storage-type information to the receivers in

advance.

According to the above invention, the storage-type information is downloaded in advance to the receivers by the download unit, and in the stream information distribution control apparatus, the time information is added to the stream information under the control of the time information addition control unit, after which the stream information is distributed to the receivers. In each receiver, the stream information received and the storage-type information held are synchronously reproduced n temporal synchronism with each other based on the time information under the control of the sync reproduction control unit.

As described above, the storage-type information are downloaded in advance to the receivers, and therefore the storage-type information is not required to be transmitted, thereby eliminating the effect of the transmission delay.

According to still another aspect of the present invention, there is provided an information distribution control system comprising a download unit which downloads in advance the storage-type information held in the stream information distribution apparatus to the storage-type information distribution apparatus, a first time information addition control unit which adds the first time information to the stream information capable of real time reproduction distributed to the receivers from the stream information

distribution apparatus, a second time information addition control unit which adds the second time information to the storage-type information distributed from the storage-type information distribution apparatus to the receivers, and a sync reproduction control unit which controls the receivers in such a manner as to reproduce the stream information and the storage-type information in temporal synchronism with each other based on the first time information and the second time information.

10 According to the above invention, the storage-type information held in the stream information distribution apparatus are downloaded in advance to the storage-type information distribution apparatus by the download unit, and the first time information is added to the stream information
15 under the control of the first time information addition control unit, while the second time information is added to the storage-type information under the control of the second time information addition control unit. The stream information and the storage-type information are received by the receivers. In
20 each of the receivers, the stream information and the storage-type information are synchronously reproduced in temporal synchronism with each other based on the first time information and the second time information under the control of the sync reproduction control unit.

25 As described above, both the stream information and the

storage-type information are synchronously reproduced in the receivers, and therefore as compared with the prior art in which only the stream information is reproduced in real time, an information distribution service with a high added value can
5 be provided.

According to still another aspect of the present invention, there is provided an information distribution control method comprising the first time information add control step of adding the first time information to the stream
10 information capable of real time reproduction distributed from the stream information distribution apparatus to the receivers, the second time information add control step of adding the second time information to the storage-type information distributed to the receivers, and the sync reproduction control
15 step of controlling the receivers in such a manner as to reproduce the stream information and the storage-type information in temporal synchronism with each other based on the first time information and the second time information.

According to the above invention, the first time
20 information is added to the stream information in the first time information add control step and the second time information is added to the storage-type information in the second time information add control step. The stream information and the storage-type information are received by the receivers. The
25 stream information and the storage-type information are

synchronously reproduced in temporal synchronism with each other based on the first time information and the second time information in the sync reproduction control step.

As described above, the stream information and the storage-type information are both synchronously reproduced in the receivers, and therefore as compared with the prior art in which only the stream information is reproduced in real time, an information distribution service with a high added value can be provided.

According to still another aspect of the present invention, there is provided a computer readable recording medium for recording an information distribution control program for permitting a computer to perform the operation comprising the first time information add control step of adding the first time information to the stream information capable of real time reproduction distributed to the receivers from the stream information distribution apparatus, the second time information add control step of adding the second time information to the storage-type information distributed to the receivers, and the sync reproduction control step of controlling the receivers in such a manner as to reproduce the stream information and the storage-type information in temporal synchronism with each other based on the first time information and the second time information.

According to the above invention, the first time

information is added to the stream information in the first time information add control step, and the second time information is added to the storage-type information in the second time information add control step. The stream information and the storage-type information are received by the receivers. In the sync reproduction control step, the stream information and the storage-type information are synchronously reproduced in temporal synchronism with each other based on the first time information and the second time information.

As described above, the stream information and the storage-type information are both synchronously reproduced in the receivers, and therefore as compared with the prior art in which only the stream information is reproduced in real time, an information distribution service with a high added value can be provided.

According to still another aspect of the present invention, there is provided an information distribution control system comprising a first receiver which receives the stream information capable of real time reproduction with the first time information added thereto, a second receiver for receiving the storage-type information with the second time information added thereto, and a sync reproduction unit which reproduces the stream information and the storage-type information in temporal synchronism with each other based on the first time information and the second time information.

1
1

According to the above invention, the stream information with the first time information added thereto is received by the first receiver and the storage-type information with the second time information added thereto is received by the second
5 receiver. The sync reproduction unit synchronously reproduces the stream information and the storage-type information in temporal synchronism with each other based on the first time information and the second time information.

As described above, the stream information and the
10 storage-type information are both synchronously reproduced in the receivers, and therefore as compared with the prior art in which only the stream information is reproduced in real time, an information distribution service with a high added value can be provided.

0513526.030600

15 According to still another aspect of the present invention, there is provided a computer readable recording medium for recording an information reproduction control program for permitting a computer to execute the operation comprising the first receiving step of receiving the stream
20 information capable of real time reproduction with the first time information added thereto, the second receiving step of receiving the storage-type information with the second time information added thereto, and the sync reproduction step of reproducing the stream information and the storage-type
25 information in temporal synchronism with each other based on

the first time information and the second time information.

According to the above invention, the stream information with the first time information added thereto is received in the first receiving step, and the storage-type information with the second time information added thereto is received in the second receiving step. In the sync reproduction step, the stream information and the storage-type information are synchronously reproduced in temporal synchronism with each other based on the first time information and the second time information.

As described above, the stream information and the storage-type information are both synchronously reproduced, and therefore as compared with the prior art in which only the stream information is reproduced in real time, an information distribution service with a high added value can be provided.

Other objects and features of this invention will become apparent from the following description with reference to the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a block diagram showing a configuration according to first to sixth embodiments of the present invention;

Fig. 2 is a block diagram showing a configuration of a stream server 10 shown in Fig. 1;

first to sixth embodiments of the present invention.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

Now, a detailed explanation will be given below of an
5 information distribution control system, an information
distribution control method, a computer readable recording
medium for recording an information distribution control
program, an information reproduction apparatus and a computer
readable recording medium for recording an information
10 reproduction control program according to first to sixth
embodiments of the present invention with reference to the
drawings.

Fig. 1 is a block diagram showing a configuration of a
first embodiment of the present invention. In an information
15 distribution system shown in Fig. 1, the stream information
(animation data and audio data) are distributed in real time
to a plurality of clients using the streaming technique, and
the storage-type information are distributed to a plurality of
clients, who reproduce the stream information and the
20 storage-type information in temporal synchronism with each
other. The storage-type information is defined as the
information which is reproduced after being accumulated or
stored in the client temporarily. In other words, the
information distribution system is for providing contents by
25 effectively combining the stream information and the

storage-type information.

The description that follows refers to the case in which a multicast scheme is used as a communication method. The multicast scheme is a communication method in which information is transmitted to a plurality of specified clients at a time and is called a specified-group broadcast communication scheme. Further, the information distribution system finds application in the live broadcast of a lecture meeting or a concert due to its capability of real time reproduction.

10 The network N shown in Fig. 1 is a LAN (local area network), an intranet, an internet, etc. for transmitting the stream information JS, the storage-type information JT described later, etc. This network N is connected with a stream server 10, a storage-type information server 20 and a sync control server 15 30 installed on the distributor side and clients 40_1 to 40_m ($m \geq n$) installed on the user (receiver) side.

The stream server 10 generates the stream information JS with a time stamp attached thereto, which information JS is distributed to the clients 40_1 to 40_m under the control of the sync control sever 30. The time stamp is the time information used for synchronous reproduction of the stream information JS and the storage-type information JT. The stream information JS, on the other hand, is the information on contents including animation data and audio data compressed with a stream band, 25 a frame rate, a screen size, etc. as parameters. The stream

band is an occupied transmission band for transmitting the stream information JS to the network N. The frame rate is the number of screens per second of the stream information reproduced in real time by the clients 40₁ to 40_m. The larger
5 the frame rate, the smoother reproduction of the animation is possible. A large frame rate, however, requires a correspondingly wider stream band. The screen size is defined as the number of pixels (number of vertical pixels multiplied by the number of horizontal pixels) making up the stream
10 information reproduced in real time on the user side.

A storage unit 11 is a hard disk unit, for example, used as a main memory for the stream server 10. A video camera 50 is installed in the place where a lecture meeting or a concert is held for picking up real time images of the proceeding of
15 the lecture meeting or the concert, as the case may be, and outputs the result of imaging to the stream server 10 as animation data D₁. In similar fashion, a microphone 60 is installed in the place where a lecture meeting or a concert is held. The microphone 60 converts the voice of the lecturer or
20 the sound in the concert hall into audio data D₂ and outputs it to the stream server 10 in real time.

A configuration of the stream server 10 described above will be described in detail with reference to Fig. 2. In Fig. 2, the component parts corresponding to the parts of Fig. 1 are
25 designated by the same reference numerals, respectively. In

the stream server 10 shown in Fig. 2, an encoder 12 generates the stream information JS by encoding the animation data D_1 and the audio data D_2 captured by the video camera 50 and the microphone 60, based on the parameters including the streamband, 5 the frame rate, the screen size, etc. described above.

Specifically, the encoder 12 converts the animation data D_1 and the audio data D_2 into digital data and then, taking the screen size, the frame rate, etc. into account, reduces the information amount of the digital data. Further, the encoder 10 12 compresses the digital data in real time using the codec technique and thus generates the stream information JS with the animation data D_1 and the audio data D_2 synchronized with each other.

The distribution control unit 13 controls the 15 distribution of the stream information JS (contents) and notifies the clients 40₁ to 40_m of the distribution of the contents. The operation of the distribution control unit 13 will be described in detail later. The network control unit 14 has the function of transmitting the stream information JS 20 to the network N at a transfer rate corresponding to the transmission band of the network N using a distribution protocol. The network control unit 14 also has the buffering function of storing the stream information JS in the case where a transmission loss of the stream information JS occurs due to 25 the congestion of the network N. The timer 15 outputs the time

count to the distribution control unit 13. The interface unit 16 acts as an interface between the distribution control unit 13 and the storage unit 11.

Returning to Fig. 1, the storage-type information server 20 distributes the storage-type information JT with the sync time information attached thereto to the clients 40₁ to 40_m under the control of the sync control server 30. The sync time information is the information on the relative time used for sync reproduction of the stream information JS and the storage-type information JT. The storage-type information JT is the information reproduced after being stored in the clients 40₁ to 40_m and include still image data, text data, etc. The storage unit 21 has the function as a main memory of the storage-type information server 20 and stores the storage-type information JT.

The sync control server 30 controls the distribution of the stream information JS and the storage-type information JT in the stream server 10 and the storage-type server 20 based on the server information J₁ and the client information J₂ shown in Fig. 4A and Fig. 4B. The sync control server 30 also controls the sync reproduction of the stream information JS and the storage-type information JT in the clients 40₁ and 40_m based on the sync reproduction information J₃ shown in Fig. 4C. The operation of the sync control server 30 will be described in detail later.

1
2
3
4
5 The server information J₁ shown in Fig. 4A is the information on the stream server 10 and the storage-type information server 20, and includes "server name", "server IP (internet protocol) address", "multicast address", "contents type" and "contents name". The "server name" is the name of the stream server 10 and the storage-type information server 20. In the case shown in Fig. 4A, "stream server" is the name of the stream server 10. The "storage-type information server" is the name of the storage-type information server 20.

10 The "server IP address" is the IP address of the stream server 10 and the storage-type information server 20, respectively. In the shown case, the "server IP address" of the stream server 10 is "11.2.3.100", and the "server IP address" of the storage-type information server 20 is 15 "11.2.3.199". The "multicast address" is the address assigned to the multicast group (specific group) existing on the network N and used as a distribution IP address for distributing the stream information JS and the storage-type information JT to the multicast group.

20 Specifically, the "multicast address" of the stream server 10 is "239.0.10.100" which is an address assigned to the multicast group configured of the clients 40₁ to 40_n, for example. In the case where the stream information JS is distributed to the multicast address "239.0.10.100", for example, the stream 25 information JS is distributed to the clients 40₁ to 40_n.

(multicast group).

In similar fashion, the "multicast address" of the storage-type information server 20 is "239.0.10.199", which is an address assigned to the multicast group configured of the clients 40₁ to 40_m, for example. In the case where the storage-type information JT is distributed to the multicast address "239.0.10.199", for example, the storage-type information JT is distributed to the clients 40₁ to 40_m (multicast group).

The "contents type" represents the type of the contents supplied from the stream information JS and the storage-type information JT. In the case shown, the "contents type" of the stream information JS is "stream type", and the "contents type" of the storage-type information JT is "storage type". The "contents name" is the name of the contents supplied from the stream information JS and the storage-type information JT. In the case shown, the "contents name" for the stream information JS is "contents A", and the "contents name" for the storage-type information JT is "contents B".

The client information J₂ shown in Fig. 4B is the information ("client name", "client IP address") on the clients 40₁ to 40_m. The "client name" is each name of the clients 40₁ to 40_m. In the shown case, they are "client 1" to "client m". The "client IP address" is the IP address assigned to each of the clients 40₁ to 40_m, and in the shown case, "22.33.44.100"

to "22.33.44.199", respectively.

00515526-030600

The sync reproduction information J_s shown in Fig. 4C is the information used for sync reproduction of the stream information J_S and the storage-type information J_T .
5 Specifically, as for "stream information J_S ", "stream server" is defined as "server name" and "contents A" is defined as "contents name". In similar fashion, as for "storage-type information J_T ", "storage-type information server" is defined as "server name", "contents B" as "contents name", and "05'20"
10 (5 minutes and 20 seconds) as "sync time". The "sync time" is the relative time used for sync reproduction of the stream information J_S and the storage-type information J_T .

Returning to Fig. 1, the storage unit 31 stores the server information J_s to J_t described above. A display unit 32 includes
15 a display unit such as a CRT (cathode-ray tube) or a LCD (liquid crystal display), and an audio output unit such as a preamplifier or a speaker for displaying an image and reproducing audio information required for controlling the sync reproduction. An input device 33 is an input device such as
20 a mouse or a keyboard.

The configuration of the sync control server 30 described above will be explained with reference to Fig. 3. In Fig. 3, the component parts corresponding to the respective parts in Fig. 1 are designated by the same reference numerals,
25 respectively. The sync control unit 34 controls the sync

reproduction of the information including the storage-type information JT and the stream information JS based on the server information J₁ to the sync reproduction information J_s (see Fig. 4A to Fig. 4C). The operation of the sync control unit 34 will
5 be described in detail later. The network control unit 35 controls the communication between the stream server 10, the storage-type information server 20 and the clients 40₁ to 40_n, for example, in accordance with the TCP/IP (transmission control protocol/internet protocol). The timer 36 outputs the
10 time count to the sync control unit 34. The timer 36 and the timer 15 shown in Fig. 2 are synchronized with each other. The interface unit 37 provides an interface between the sync control unit 34, the storage unit 31, the display unit 32 and the input device 33.

15 Returning to Fig. 1, the clients 40₁ to 40_n synchronously reproduce the stream information JS and the storage-type information JT distributed through the network N from the stream server 10 and the storage-type information server 20, respectively, under the control of the sync control server 30.
20 Specifically, the clients 40₁ to 40_n reproduce the stream information JS in real time, and reproduces the storage-type information JT when the time after the sync reproduction of the stream information JS has reached the "sync time" (for example, 05'20) shown in Fig. 4C.

25 The display units 41₁ to 41_n each include a display unit

such as a CRT or LCD and an audio output unit such as a preamplifier or a speaker. The display unit displays an animation when the stream information JS is reproduced in real time, and displays a still image or the like when the storage-type information JT is reproduced. The audio output unit, on the other hand, outputs audio information when the stream information JS is reproduced in real time. The input units 42₁ to 42_m are each a mouse, a keyboard or the like input device. The storage units 43₁ to 43_m store (accumulate) the storage-type information JT distributed from the storage-type information server 20.

The configuration of the client 40₁ described above will be explained in detail below with reference to Fig. 5. In Fig. 5, those component parts corresponding to the parts in Fig. 1 are designated by the same reference numerals, respectively. The receiving control unit 44₁ shown in Fig. 5 controls the receiving operation and the sync reproduction of the stream information JS and the storage-type information JT distributed. The operation of the receiving control unit 44₁ will be described in detail later. The network control unit 45₁ controls the communication with the stream server 10 and the storage-type information server 20 according to the distribution protocol.

The network control unit 45₁ also controls the communication with the sync control server 30 in accordance with TCP/IP. The timer 46₁ outputs the time count to the receiving

control unit 44₁. The interface unit 47₁ provides an interface between the receiving control unit 44₁, the display unit 41₁, the input unit 42₁ and the storage unit 43₁. The configuration of the other clients 40₂ (not shown) to 40_n is the same as that of the client 40₁ described above.

Now, the first example of the operation of the first embodiment will be explained with reference to the flowchart shown in Fig. 6. In Fig. 1, once the stream server 10, the storage-type information server 20 and clients 40₁ to 40_n are activated, the process proceeds to steps SA1, SB1 and SD1, respectively, shown in Fig. 6. In step SA1, the distribution control unit 13 of the stream server 10 shown in Fig. 2 determines whether the sync control server 30 has instructed to distribute the stream information JS or not. In the case under consideration, the answer is NO and the same process of determination is repeated.

In similar manner, in step SB1, the storage-type information server 20 determines whether the sync control server 30 has instructed to distribute the storage-type information JT or not. In the case under consideration, the answer is NO, and the same process of determination is repeated. Further, in step SD1, the clients 40₁ to 40_n determine whether the sync control server 30 has given a receive/reproduce instruction or not. In the case under consideration, the answer is assumed to be NO and the same process of determination is

repeated. In the description that follows, reference is primarily made to the operation of the client 40₁ shown in Fig. 5 since the operation of the clients 40₂ (not shown) to 40_m is similar to that of the client 40₁.

5 In step SD1, the receiving control unit 44₁ of the client 40₁ shown in Fig. 5 determines whether the sync control server 30 has given a receive/reproduce instruction or not. The receive/reproduce instruction concerns an instruction to receive the stream information JS and the storage-type
10 information JT and to synchronously reproduce the stream information JS and the storage-type information JT.

Upon receipt of the information that the distributor has instructed to start distribution using the input unit 33 shown in Fig. 3, the sync control unit 34 of the sync control server
15 30 proceeds to step SC1. In step SC1, the sync control unit 34 first reads the server information J₁ and the sync reproduction information J₂ shown in Fig. 4A and Fig. 4C from the storage unit 31. Then, the sync control unit 34 recognizes the information ("server name", "contents name", "sync time")
20 on the stream information JS and the storage-type information JT to be synchronously reproduced from the sync reproduction information J₂.

In this case, the sync control unit 34 recognizes "stream server" (stream server 10) and "contents A" as the information
25 on the stream information JS, and "storage-type information

server" (storage-type information server 20), "contents B" and "05'20" (sync time) as the information on the storage-type information JT. Then, the sync control unit 34 recognizes "stream server" (stream server 10) and "storage-type information server" (storage-type information server 20) for distributing the stream information JS and the storage-type information JT, respectively, from the server information J₁.

Further, the sync control unit 34 recognizes "multicast address" (239.0.10.100) of the destination of distribution of the stream information JS and "multicast address" (239.0.10.199) of the destination of distribution of the storage-type information JT from the server information J₁. Then, the sync control unit 34 instructs the stream server 10 through the network N to distribute the stream information JS for "contents A" to the multicast address "239.0.10.100". In parallel to this instruction, the sync control unit 34 instructs the storage-type information server 20 through the network N to transmit the storage-type information JT for "contents B" to the multicast address "239.0.10.199" and to set the sync time at "05'20", after which the process proceeds to step SC2.

As a result, the distribution control unit 13 of the stream server 10 shown in Fig. 2 determines the answer in step SA1 as YES and proceeds to step SA2. In step SA2, the distribution control unit 13 starts distributing the stream information JS for "contents A". Specifically, the animation

data D_1 and the audio data D_2 for "contents A" are output from the video camera 50 and the microphone 60, respectively. Once the animation data D_1 and the audio data D_2 are captured by the encoder 12, the encoder 12 encodes and compresses the animation data D_1 and the audio data D_2 based on the parameters including the stream band and thereby generates the stream information JS.

The distribution control unit 13 transmits the stream information JS with a time stamp attached thereto through the network control unit 14 and the network N to the multicast address "239.0.10.100" (see Fig. 4A) based on the time count of the timer 15, after which the process proceeds to step SA3. As a result, the stream information JS with a time stamp attached thereto is distributed to the clients 40_1 to 40_m , respectively, corresponding to the multicast address "239.0.10.100". The time stamp attached to the stream information JS is the information constantly changing according to the time count on the timer 15. In step SA3, the distribution control unit 13 determines whether the distribution of the stream information JS is completed or not, and the result of determination is kept at NO until the distribution is completed.

Upon receipt of an instruction from the sync control unit 34 of the sync control server 30, on the other hand, the storage-type information server 20 determines the answer in step SB1 as YES, and proceeds to step SB2. In step SB2, the

storage-type information server 20 first reads the storage-type information JT from the storage unit 21. Then, the storage-type information server 20 transmits the storage-type information JT with the sync time information attached thereto
5 corresponding to the sync time ("05'20", see Fig. 4C) designated by the sync control unit 34 to the multicast address "239.0.10.199" (see Fig. 4A) through the network N, after which the process proceeds to step SB3.

As a result, the storage-type information JT with the sync
10 time information attached thereto is distributed to the clients 40₁ to 40_n corresponding to the multicast address "239.0.10.199". The sync time information ("05'20") attached to the storage-type information JT is a constant value. In step SB3, the storage-type information serve 20 determines whether the
15 distribution of the storage-type information JT is complete or not, and keeps the result of determination at NO until the distribution is complete.

In step SC2, on the other hand, the sync control unit 34 of the sync control server 30 shown in Fig. 3 reads the client
20 information J₂ (see Fig. 4B) from the storage unit 31, and then gives a receive/reproduce instruction to the IP addresses "22.33.44.100" to "22.33.44.199" obtained from the client information J₂, i.e. the clients 40₁ to 40_n, respectively. The receive/reproduce instruction is the one to receive the stream
25 information JS transmitted to the multicast address

239.0.10.100", to reproduce the stream information JS in real time, to receive the storage-type information JT transmitted to the multicast address "239.0.10.199", and to synchronously reproduce the storage-type information JT and the stream
5 information JS at the same time point ("05'20").

Upon receipt of the receive/reproduce instruction, the receiving control unit 44_i of the client 40_i shown in Fig. 5 determines the answer in step SD1 as YES, and proceeds to step SD2. In step SD2, the receiving control unit 44_i starts
10 receiving the stream information JS transmitted to the multicast address "239.0.10.100". In similar fashion, the receiving control unit 44_i starts receiving the storage-type information JT transmitted to the multicast address "239.0.10.199", and stores (accumulates) the received
15 storage-type information JT in the storage unit 43_i through the interface unit 47_i.

In step SD3, the receiving control unit 44_i performs the process of synchronously reproducing the stream information JS and the storage-type information JT. Specifically, the
20 receiving control unit 44_i generates the animation data and the audio data by restoring the stream information JS, and then supplies the animation data and the audio data to the display unit 41_i through the interface unit 47_i. As a result, the animation and audio data for "contents A" are reproduced in the
25 display unit 41_i. Further, based on the time stamp added to

the stream information JS, the receiving control unit 44₁ determines a reference time at the time point when the real time reproduction of the stream information JS is started (hereinafter referred to as the real time reproduction start time).

During the real time reproduction of the stream information JS, the receiving control unit 44₁ monitors whether the relative time point based on the real time reproduction start time coincides with the sync time point ("05'20") added to the storage-type information JT. Once the relative time point comes to coincide with the sync time point ("05'20"), the receiving control unit 44₁ outputs the storage-type information JT stored (accumulated) in the storage unit 43₁ to the display unit 41₁. In the display unit 41₁, the storage-type information JT is synchronized with the stream information JS and then the storage-type information JT for "contents B" is synchronously reproduced. Then, a second example of the operation of the first embodiment will be explained with reference to the flowchart shown in Fig. 7. In the second example of operation, assume that the distributor (lecturer) holds a lecture meeting using a teaching material and the proceeding of the lecture meeting is broadcast live. Specifically, in the description that follows, reference is made to the case in which the animation and audio data for the lecture meeting are distributed as the stream information JS ("contents A", see Fig. 4A) to the clients

40₁ to 40_m on the one hand, and the storage-type information JT ("contents B", see Fig. 4A) for the teaching material are distributed to the clients 40₁ to 40_m on the other hand.

In the second example of operation, therefore, the still
5 image data for the teaching material are stored in advance as the storage-type information JT by page in the storage unit 21 shown in Fig. 1. On the other hand, the storage-type information distribution control program is stored in the storage unit 31 beforehand, and the sync control server 30
10 controls the distribution of the storage-type information JT by executing the storage-type information distribution control program.

In Fig. 1, the stream server 10, the storage-type information server 20 and the clients 40₁ to 40_m, once activated,
15 proceed to steps SE1, SF1 and SH1, respectively, shown in Fig. 7. Thus, as in the first example of operation described above, the distribution control unit 13 of the stream server 10 shown in Fig. 2 determines in step SE1 whether the sync control server 30 has given an instruction to distribute the stream information JS or not, and the storage-type information server 20 determines
20 in step SF1 whether the sync control server 30 has given an instruction to distribute the storage-type information JT or not. In step SH1, on the other hand, the clients 40₁ to 40_m determine whether the sync control server 30 has given a
25 receive/reproduce instruction or not.

When the distributor inputs the information instructing the stream information JS to be distributed using the input device 33 shown in Fig. 3, the sync control unit 34 of the sync control server 30 proceeds to step SG1. In step SG1, the sync control unit 34 first reads the server information J₁ shown in Fig. 4A from the storage unit 31. Then, the sync control unit 34, as in the first example of operation, recognizes the "multicast address" ("239.0.10.100") of the destination of distribution of the stream information JS from the server information J₁. Then, the sync control unit 34 instructs the stream server 10 through the network N to distribute the stream information JS for "contents A" to the multicast address "239.0.10.100", and then proceeds to step SG2.

As a result, the distribution control unit 13 of the stream server 10 shown in Fig. 2 determines the answer in step SE1 as YES, and proceeds to step SE2. In step SE2, the distribution control unit 13 starts distributing the stream information JS for "contents A" (lecture meeting). Specifically, from the video camera 50 and the microphone 60, once "contents A", i.e. the animation data D₁ and the audio data D₂ on the lecture meeting are captured by the encoder 12, the encoder 12 encodes and compresses the animation data D₁ and the audio data D₂ based on the parameters such as the stream band and thus generates the stream information JS.

The distribution control unit 13 transmits the stream

information JS with a time stamp attached thereto input thereto from the timer 15 to the multicast address "239.0.10.100" (see Fig. 4A) through the network control unit 14 and the network N, and then proceeds to step SE3. In step SE3, the distribution control unit 13 determines whether an instruction is given to end the distribution of the stream information JS or not, and until such an instruction is given, keeps the determination as NO.

In step SG2, on the other hand, the sync control unit 34 of the sync control server 30 shown in Fig. 3 activates the storage-type information distribution control program stored in the storage unit 31, and proceeds to step SG3. In step SG3, the sync control unit 34 determines whether an instruction to display the next page of the teaching material (hereinafter called the next page display instruction) is given from the distributor (lecturer) or not. This next page display instruction is for displaying the storage-type information JT (still image data) for the next page on the display units 41₁ to 41_n in a lecture meeting conducted turning page by page of the teaching material.

When the distributor (lecturer) gives an instruction to display the next page using the input device 33, the sync control unit 34 turns YES the determination in step SG3, and proceeds to step SG4. In this case, the next page is the first page of the teaching material. Further, the sync control unit 34

recognizes the time point when the next page display instruction is given as the sync time based on the count on the timer 36.

In step SG4, the sync control unit 34 recognizes the "multicast address" ("239.0.10.199") of the destination of distribution of the storage-type information JT from the sync server information J_1 . Then, the sync control unit 34 instructs the storage-type information server 20 through the network N to transmit the storage-type information JT for the first page to the multicast address "239.0.10.199" and as to the sync time described above, and the proceeds to step SG5.

As a result, the storage-type information server 20 determines the answer in step SF1 as YES, and proceeds to step SF2. In step SF2, the storage-type information server 20 first reads the storage-type information JT for the first page from the storage unit 21. Then, the storage-type information server 20 transmits the storage-type information JT with the sync time information corresponding to the sync time designated by the sync control unit 34, to the multicast address "239.0.10.199" (see Fig. 4A) through the network N, and then proceeds to step SF3. In step SF3, the storage-type information server 20 determines whether the storage-type information JT for the first page has been completely distributed or not. In the case under consideration, the answer is NO and the same process of determination is repeated.

Upon complete distribution of the storage-type

information JT for the first page, the storage-type information server 20 determines the answer in step SF3 as YES and proceeds to step SF4. In step SF4, the storage-type information server 20 determines whether an instruction is given by the sync control server 30 to end the process. Since the answer is NO, the process returns to step SF1. After that, in step SF1, the storage-type information server 20 determines whether an instruction is given to distribute the storage-type information JT for the next page.

The storage-type information JT with the sync time information attached thereto is distributed to the clients 40₁ to 40_m corresponding to the multicast address "239.0.10.199". In step SF3, the sync control server 30 determines whether the distribution of the storage-type information JT is complete or not, and until the distribution is completed, the determination is kept at NO.

In step SG5, on the other hand, the sync control unit 34 of the sync control server 30 shown in Fig. 3 reads the client information J₂ (see Fig. 4B) from the storage unit 31, and then gives a receive/reproduce instruction to the IP addresses "22.33.44.100" to "22.33.44.199" obtained from the client information J₂, i.e. the clients 40₁ to 40_m, after which the process proceeds to step SG6.

This receive/reproduce instruction is for receiving the stream information JS transmitted to the multicast address

239.0.10.100", reproducing the stream information JS in real time, receiving the storage-type information JT for the first page transmitted to the multicast address "239.0.10.199", and synchronously reproducing the storage-type information JT and
5 the stream information JS for the first page at the sync time.

Upon receipt of the receive/reproduce instruction, the receiving control unit 44₁ of the client 40₁ shown in Fig. 5 determines the answer in step SH1 as YES, and proceeds to step SH2. In step SH2, the receiving control unit 44₁ starts
10 receiving the stream information JS transmitted to the multicast address "239.0.10.100". In similar fashion, the receiving control unit 44₁ starts receiving the storage-type information JT for the first page transmitted to the multicast address "239.0.10.199", and stores (accumulates) the received
15 storage-type information JT in the storage unit 43₁ through the interface unit 47₁.

The receiving control unit 44₁, after performing the process for synchronously reproducing the stream information JS and the storage-type information JT, proceeds to step SH3.
20 Specifically, the receiving control unit 44₁ generates the animation data and the audio data by restoring the stream information JS, and then supplies the resulting animation data and the audio data to the display unit 41₁ through the interface unit 47₁. As a result, in the display unit 41₁, the animation
25 and the audio data for "contents A" are reproduced in real time.

Further, during the real time reproduction of the stream information JS, the receiving control unit 44₁ monitors whether the time stamp obtained from the stream information JS coincides with the sync time obtained from the sync time information attached to the storage-type information JT. Once the time stamp comes to coincide with the sync time, the receiving control unit 44₁ outputs the storage-type information JT for the first page stored (accumulated) in the storage unit 43₁ to the display unit 41₁. As a result, in the display unit 41₁, the storage-type information JT is synchronized with the stream information JS and then the storage-type information JT for the first page of the teaching material is synchronously reproduced.

In step SH3, the receiving control unit 44₁ determines whether the reproduction of the storage-type information JT for the first page has been complete or not, and in the case where this determination is NO, the same process for determination is repeated. Upon complete reproduction of the storage-type information JT for the first page, the receiving control unit 44₁ turns YES the determination in step SH3, and proceeds to step SH4. In step SH4, the receiving control unit 44₁ determines whether an instruction is given by the sync control server 30 to end the process. In the case under consideration, the answer is NO, and the process is returned to step SH1. After that, in step SH1, the receiving control unit 44₁ determines whether

the receive/reproduce instruction for the storage-type information JT for the next page has been given or not. In the case under consideration, the answer is NO and the process for the same determination is repeated. Until the determination is made, the stream information JS continues to be reproduced in real time.

In step SG6, the sync control server 30 determines whether an instruction is given by the distributor (lecturer) to end the process. In the case under consideration, the determination is NO, and the process returns to SG3. In step SG3, the sync control unit 34 determines whether an instruction is given by the distributor (lecturer) to display the next page. In the case where an instruction is given by the distributor (lecturer) to display the next page using the input device 33, the sync control unit 34 determines the answer in step SG3 as YES and proceeds to step SG4. In the case under consideration, the next page is the second page of the teaching material. Further, the sync control unit 34 recognizes, as the sync time, the time when the instruction is given to display the next page based on the count on the timer 36.

In step SG4, the sync control unit 34 recognizes the "multicast address" ("239.0.10.199") of the destination of distribution of the storage-type information JT from the server information J₁ (see Fig. 4A). Then, the sync control unit 34 instructs the storage-type information server 20 through the

network N to transmit the storage-type information JT for the second page to the multicast address "239.0.10.199" and as to the sync time described above, after which the process proceeds to step SG5.

- 5 As a result, the storage-type information server 20 determines the answer in step SF1 as YES and proceeds to step SF2. In step SF2, the storage-type information server 20 first reads the storage-type information JT for the second page from the storage unit 21. Then, the storage-type information server
- 10 20 transmits the storage-type information JT with the sync time information designated by the sync control unit 34 attached thereto, to the multicast address "239.0.10.199" (see Fig. 4A) through the network N. As a result, the storage-type information JT with the sync time information attached thereto
- 15 is distributed to the clients 40₁ to 40_m corresponding to the multicast address "239.0.10.199", respectively.

- In step SG5, on the other hand, the sync control unit 34 of the sync control server 30 shown in Fig. 3 reads the client information J₂ (see Fig. 4B) from the storage unit 31, and then
- 20 gives a receive/reproduce instruction to the IP addresses "22.33.44.100" to "22.33.44.199" obtained from the client information J₂, i.e. to the clients 40₁ to 40_m, after which the process proceeds to step SG6.

- The receive/reproduce instruction involved is to receive
- 25 the stream information JS transmitted to the multicast address

"239.0.10.100", to reproduce the stream information JS in real time, to receive the storage-type information JT for the second page transmitted to the multicast address "239.0.10.199", and to synchronously reproduce the storage-type information JT and
5 the stream information JS for the second page at the sync time.

Upon receipt of the receive/reproduce instruction, the receiving control unit 44₁ of the client 40₁ shown in Fig. 5 determines the answer in step SH1 as YES and proceeds to step SH2. In step SH2, the storage-type information JT for the
10 second page transmitted to the multicast address "239.0.10.199" begins to be received, and the storage-type information JT thus received are stored (accumulated) in the storage unit 43₁ through the interface unit 47₁.

During the real time reproduction of the stream
15 information JS, the receiving control unit 44₁ monitors whether the time stamp obtained from the stream information JS has come to coincide with the sync time obtained from the sync time information attached to the storage-type information JT for the second page. When the time stamp comes to coincide with the
20 sync time, the receiving control unit 44₁ outputs the storage-type information JT for the second page stored (accumulated) in the storage unit 43₁ to the display unit 41₁. As a result, in the display unit 41₁, the storage-type information JT for the second page of the teaching material is
25 synchronously reproduced in temporal synchronism with the

stream information JS. After that, each time the distributor (lecturer) gives an instruction to display the next page, the storage-type information JT for the third and subsequent pages is reproduced in synchronism with the stream information JS by way of the operation described above in the client 40₁.

When the lecture meeting is finished, the distributor (lecturer) gives an instruction to the process using the input device 33 of Fig. 3. As a result, the sync control unit 34 determines the answer in step SG6 as YES and proceeds to step SG7. In step SG7, the sync control unit 34 gives an instruction to end the process to the stream server 10, the storage-type information server 20 and the clients 40₁ to 40_n through the network N. Upon receipt of the instruction to end the process, the stream server 10 determines the answer in step SE3 as YES, and ends the process of distributing the stream information JS. The storage-type information server 20 also determines the answer in step SF4 as YES, and ends the process of distributing the storage-type information JT. In similar fashion, the clients 40₁ to 40_n determine the answer in step SH4 as YES, respectively, and ends the receive/reproduce process.

As described above, according to the first embodiment, the stream information JS and the storage-type information JT are both synchronously reproduced in the clients 40₁ to 40_n under the control of the sync control server 30. Therefore, as compared with the prior art case in which only the stream

information JS is reproduced in real time, an information distribution service with a high added value can be provided.

Further, according to the first embodiment, as explained with reference to the second example of operation, the still
5 image data for the teaching material of the lecture meeting is distributed as the storage-type information JT. Therefore, the still image with thin characters and thin lines can be reproduced in the clients 40₁ to 40_m.

The first embodiment described above refers to the case
10 in which the storage-type information JT shown in Fig. 1 is stored beforehand in the storage unit 21, and distributed from the storage-type information server 20 to the clients 40₁ to 40_m. As an alternative, the storage-type information JT is stored in advance in the storage unit 11 of the stream server
15 10, and distributed to the clients 40₁ to 40_m from the stream server 10. The latter case will be described in detail below as a second embodiment.

According to the second embodiment, the storage-type information server 20 and the storage unit 21 shown in Fig. 1
20 are lacking. Further, the storage unit 11 has stored therein the storage-type information JT. The stream server 10, in addition to the function of distributing the stream information JS described with reference to the first embodiment, has the function as the storage-type information server 20. Further,
25 according to the second embodiment, the "server name" of the

server information J_1 shown in Fig. 4A is indicated as "stream server" in place of "storage-type information sever" shown in the same drawing. Further, according to the second embodiment, the "server name" for the storage-type information JT shown in Fig. 4C is given as "stream server" in place of "storage-type information server" shown in the same drawing.

Now, the operation of the second embodiment will be explained with reference to the flowchart of Fig. 8. In Fig. 1, the stream server 10 and the clients 40_1 to 40_m , once activated, proceed to step SI1 and step SK1, respectively, in Fig. 8. In step SI1, the distribution control unit 13 of the stream server 10 shown in Fig. 2 determines whether an instruction is given by the sync control server 30 to distribute the stream information JS and the storage-type information JT. In the case under consideration, the determination is NO and the process of determination is repeated.

In step SK1, on the other hand, the clients 40_1 to 40_m determine whether a receive/reproduce instruction has been given from the sync control server 30. In this case, the determination is NO and the process for the same determination is repeated. The operation of the clients 40_2 (not shown) to 40_m is similar to that of the client 40_1 , and therefore in the description that follows, reference is had primarily to the operation of the client 40_1 shown in Fig. 5.

In step SK1, the receiving control unit 44_1 of the client

40₁ shown in Fig. 5, like in step SD₁ (see Fig. 6), determines whether a receive/reproduce instruction has been given from the sync control server 30 or not. When the information instructing to start distribution is input by use of the input device 33
5 shown in Fig. 3 from the distributor, the sync control unit 34 of the sync control server 30 proceeds to step SJ₁. In step SJ₁, the sync control unit 34, like in step SC₁ (see Fig. 6), reads the server information J₁ and the sync reproduction information J₃ shown in Fig. 4A and Fig. 4C, respectively, from
10 the storage unit 31. Then, the sync control unit 34 recognizes the information ("server name", "contents name", "sync time") for the stream information JS and the storage-type information JT to be synchronously reproduced, from the sync reproduction information J₃.

15 Further, the sync control unit 34 recognizes the "multicast address" ("239.0.10.100") of the destination of distribution of the stream information JS and the "multicast address" ("239.0.10.199") of the destination of distribution of the storage-type information JT, respectively, from the
20 server information J₁. Then, the sync control unit 34 instructs the stream server 10 through the network N to distribute the stream information JS for "contents A" to the multicast address "239.0.10.100", to transmit the storage-type information JT for "contents B" to the multicast address "239.0.10.199" and to set
25 the sync time at "05'20", after which the process proceeds to

step SJ2.

As a result, the distribution control unit 13 of the stream server 10 shown in Fig. 2 determines the answer in step SI1 as YES, and proceeds to step SI2. In step SI2, the distribution control unit 13 starts distributing the stream information JS and the storage-type information JT for "contents A" and "contents B".

Specifically, the stream server 10, like in the first embodiment, generates the stream information JS based on the animation data D_1 and the audio data D_2 from the video camera 50 and the microphone 60. In the distribution control unit 13, the stream information JS with the time stamp attached thereto based on the time count on the timer 15 is transmitted to the multicast address "239.0.10.100" (see Fig. 4A) through the network control unit 14 and the network N. As a result, the stream information JS with a time stamp attached thereto is distributed to the clients 40_1 to 40_m corresponding to the multicast address "239.0.10.100".

Further, concurrently with the distribution of the stream information JS, the distribution control unit 13 reads the storage-type information JT from the storage unit 11. Then, the storage-type information JT with the sync time information attached thereto corresponding to the sync time ("05'20", see Fig. 4C) designated by the sync control unit 34 is transmitted to the multicast address "239.0.10.199" (see Fig. 4A) through

the network N, and then the process proceeds to step SI3.

As a result, the storage-type information JT with the sync time information attached thereto is distributed to the clients 40₁ to 40_n, respectively, corresponding to the multicast address "239.0.10.199". The sync time information ("05'20") attached to the storage-type information JT is a constant value. In step SI3, the distribution control unit 13 determines whether the distribution of the stream information JS and the storage-type information JT has been complete or not, and until the distribution is complete, keeps the determination as NO.

In step SJ2, on the other hand, the sync control unit 34 of the sync control server 30 shown in Fig. 3, like in step SC2 (see Fig. 6), reads the client information J₂ (see Fig. 4B) from the storage unit 31, and then based on the client information J₂, gives a receive/reproduce instruction to the clients 40₁ to 40_n. This receive/reproduce instruction is to receive the stream information JS transmitted to the multicast address "239.0.10.100", to reproduce the stream information JS in real time, to receive the storage-type information JT transmitted to the multicast address "239.0.10.199", and to synchronously reproduce the storage-type information JT and the stream information JS at the same sync time point ("05'20").

Upon receipt of the receive/reproduce instruction, the receiving control unit 44₁ of the client 40₁ shown in Fig. 5 determines the answer in step SK1 as YES, and proceeds to step

SK2. In step SK2, the receiving control unit 44₁ starts receiving the stream information JS transmitted to the multicast address "239.0.10.100". In similar fashion, the receiving control unit 44₁ starts receiving the storage-type information JT transmitted to the multicast address "239.0.10.199", and stores (accumulates) the received storage-type information JT in the storage unit 43₁ through the interface unit 47₁. In step SK3, the receiving control unit 44₁, like in step SD3 (see Fig. 6), performs the process for synchronously reproducing the stream information JS and the storage-type information JT.

As described above, according to the second embodiment, a similar effect to that of the first embodiment is obtained, and since the stream information JS and the storage-type information JT are distributed from the same stream server 10, the effect of transmission delay in the network N can be reduced.

The third embodiment is explained below. In the first embodiment described above, the storage-type information JT shown in Fig. 1 is stored beforehand in the storage unit 21, and distributed from the storage-type information server 20 to the clients 40₁ to 40_m. As an alternative, the storage-type information JT can be stored in the storage units 43₁ to 43_m of the clients 40₁ to 40_m, respectively. The latter case will be explained in detail as a third embodiment below.

In the third embodiment, the storage-type information

the answer is NO, and the same process for determination is repeated. In the description that follows, reference is primarily had to the operation of the client 40₁ shown in Fig. 5, since the operation of the clients 40₂ (not shown) to 40_m is similar to that of the client 40₁.

In step SN1, the receiving control unit 44₁ of the client 40₁ shown in Fig. 5, like in step SD1 (see Fig. 6), determines whether a receive/reproduce instruction has been given from the sync control server 30 or not. When the information instructing to start the distribution is input by way of the input device 33 shown in Fig. 3 from the distributor, the sync control unit 34 of the sync control server 30 proceeds to step SM1. In step SM1, the sync control unit 34 reads the server information J₁ shown in Fig. 4A and the sync reproduction information J₄ shown in Fig. 10 from the storage unit 31. Then, the sync control unit 34 recognizes the information ("server name", "client name", "contents name", "sync time") for the stream information JS and the storage-type information JT to be synchronously reproduced, from the sync reproduction information J₄.

Further, the sync control unit 34 recognizes the "multicast address" ("239.0.10.100") of the destination of distribution of the stream information JS from the server information J₁. Then, the sync control unit 34 instructs the stream server 10 through the network N to distribute the stream information JS for "contents A" to the multicast address

"239.0.10.100", after which the process proceeds to step SM2.

As a result, the distribution control unit 13 of the stream server 10 shown in Fig. 2 determines the answer in step SL1 as YES, and proceeds to step SL2. In step SL2, the distribution control unit 13 starts distributing the stream information JS for "contents A". Specifically, the distribution control unit 13 transmits the stream information JS with a time stamp attached thereto based on the count on the timer 15 to the multicast address "239.0.10.100" (see Fig. 4A) through the network control unit 14 and the network N. As a result, the stream information JS with a time stamp attached thereto is distributed to the clients 40₁ to 40_m corresponding to the multicast address "239.0.10.100", respectively.

In step SM2, on the other hand, the sync control unit 34 of the sync control server 30 shown in Fig. 3, like in step SC2 (see Fig. 6), reads the client information J₂ (see Fig. 4B) from the storage unit 31, and based on this client information J₂, gives a receive/reproduce instruction to the clients 40₁ to 40_m, respectively. The receive/reproduce instruction is to receive the stream information JS transmitted to the multicast address "239.0.10.100", to reproduce the stream information JS in real time, to read the storage-type information JT from the storage units 43₁ to 43_m, respectively, and to synchronously reproduce the storage-type information JT and the stream information JS at the sync time ("05'20") (see Fig. 10).

Upon receipt of the receive/reproduce instruction, the receiving control unit 44₁ of the client 40₁ shown in Fig. 5 determines the answer in step SN1 as YES and proceeds to step SN2. In step SN2, the receiving control unit 44₁ starts receiving the stream information JS transmitted to the multicast address "239.0.10.100", and then proceeds to step SN3. In step SN3, the receiving control unit 44₁ reads the storage-type information JT from the storage unit 43₁, and then, like in step SD3 (see Fig. 6), performs the process of synchronously reproducing the stream information JS and the storage-type information JT.

Specifically, the receiving control unit 44₁ reproduces the stream information JS in real time, and monitors whether the relative time based on the real time reproduction start time has come to coincide with the sync time ("05'20") added to the storage-type information JT. Once the relative time comes to coincide with the sync time ("05'20"), the receiving control unit 44₁ outputs the storage-type information JT to the display unit 41₁. As a result, in the display unit 41₁, the storage-type information JT for "contents B" is reproduced in temporal synchronism with the stream information JS.

As described above, according to the third embodiment, a similar effect to that of the first embodiment is obtained, and since the storage-type information JT is stored beforehand in the storage units 43₁ to 43_n of the clients 40₁ to 40_n, the

storage-type information JT is not required to be transmitted on the network N and therefore operation is not affected by a transmission delay.

In the first embodiment described above, the storage-type information JT shown in Fig. 1 is stored beforehand in the storage unit 21, and distributed to the clients 40₁ to 40_n from the storage-type information server 20. Alternatively, the storage-type information JT is transmitted to the stream server 10 from the storage-type information server 20 before synchronous reproduction, and then the storage-type information JT is distributed from the stream server 10. In the description that follows, the latter case will be explained in detail as a fourth embodiment.

The operation of the fourth embodiment will be explained below with reference to the flowchart of Fig. 11. In Fig. 1, the stream server 10, the storage-type information server 20 and the clients 40₁ to 40_n, once activated, proceed to steps S01, SP1 and SR1, respectively, shown in Fig. 11. In step S01, the distribution control unit 13 of the stream server 10 shown in Fig. 2 determines whether the storage-type information JT transmitted from the storage-type information server 20 has been received or not. In the case under consideration, the determination is NO, and the same process for determination is repeated. In step SP1, the storage-type information server 20 determines whether an instruction is given by the sync control

09210522E.030600

Then, the sync control unit 34 recognizes the information ("server name", "client name", "contents name", "sync time") for the stream information JS and the storage-type information JT to be synchronously reproduced, from the sync reproduction information J, shown in Fig. 4C. The sync control unit 34, based on the server IP address "11.2.3.199", instructs the storage-type information server 20 to transmit the storage-type information JT, and then proceeds to step SQ2.

As a result, the storage-type information server 20 determines the answer in step SP1 as YES and proceeds to step SP2. In step SP2, the storage-type information server 20 reads the storage-type information JT from the storage unit 21 and transmits it to the stream server 10. Upon receipt of the storage-type information JT, the distribution control unit 13 of the stream server 10 shown in Fig. 2 determines the answer in step SO1 as YES and proceeds to step SO2. In step SO2, the stream server 10 stores the received storage-type information JT in the storage unit 11, and then proceeds to step SO3. In step SO3, the distribution control unit 13 of the stream server 10 determines whether an instruction is given by the sync control server 30 to distribute the stream information JS and the storage-type information JT. In the case under consideration, the determination is NO, and the same process for determination is repeated.

In step SQ2, the sync control unit 34 of the sync control

server 30 shown in Fig. 3, like in step SC1 (see Fig. 6), recognizes the "multicast address" ("239.0.10.100") of the destination of distribution of the stream information JS and the "multicast address" ("239.0.10.199") of the destination of distribution of the storage-type information JT, from the server information J₁. Then, the sync control unit 34 instructs the stream server 10 through the network N to distribute the stream information JS for "contents A" to the multicast address "239.0.10.100", to transmit the storage-type information JT for "contents B" to the multicast address "239.0.10.199", and to set the sync time at "05'20". Then, the process proceeds to step SQ3.

As a result, the distribution control unit 13 of the stream server 10 shown in Fig. 2 determines the answer in step SO3 as YES, and proceeds to step SO4. In step SO4, the distribution control unit 13 starts distributing the stream information JS and the storage-type information JT for "contents A" and "contents B".

Specifically, the distribution control unit 13 of the stream server 10, like in step SI2 (see Fig. 8), transmits the stream information JS with the time stamp attached thereto, generated based on the animation data D₁ and the audio data D₂, to the multicast address "239.0.10.100" (see Fig. 4A) through the network control unit 14 and the network N. As a result, the stream information JS with a time stamp attached thereto

is distributed to the clients 40_1 to 40_m corresponding to the multicast address "239.0.10.100".

Concurrently with the distribution of the stream information JS, the distribution control unit 13 reads the
5 storage-type information JT from the storage unit 11. Then, the storage-type information JT with the sync time information corresponding to the sync time ("05'20", see Fig. 4C) attached thereto, designated by the sync control unit 34, is transmitted to the multicast address "239.0.10.199" (see Fig. 4A) through
10 the network N, after which the process proceeds to step S05.

As a result, the storage-type information JT with the sync time information attached thereto is distributed to the clients 40_1 to 40_m corresponding to the multicast address "239.0.10.199", respectively. The sync time information ("05'20") attached to
15 the storage-type information JT is a constant value. In step S05, the distribution control unit 13 determines whether the distribution of the stream information JS and the storage-type information JT has been completed, and until the distribution is complete, keeps the determination as NO.

20 In step SQ3, on the other hand, the sync control unit 34 of the sync control server 30 shown in Fig. 3, like in step SJ2 (see Fig. 8), reads the client information J_2 (see Fig. 4B) from the storage unit 31, and then based on the client information J_2 , gives a receive/reproduce instruction to the clients 40_1
25 to 40_m . In the case under consideration, the receive/reproduce

instruction is to receive the stream information JS transmitted to the multicast address "239.0.10.100", to reproduce the stream information JS in real time, to receive the storage-type information JT transmitted to the multicast address
5 "239.0.10.199", and to synchronously reproduce the storage-type information JT and the stream information JS at the sync time ("05'20").

Upon receipt of the receive/reproduce instruction, the receiving control unit 44₁ of the client 40₁ shown in Fig. 5
10 determines the answer in step SR1 as YES, and proceeds to step SR2. In step SR2, the receiving control unit 44₁ starts receiving the stream information JS transmitted to the multicast address "239.0.10.100". In similar fashion, the receiving control unit 44₁ starts receiving the storage-type
15 information JT transmitted to the multicast address "239.0.10.199" and stores (accumulates) the received storage-type information JT in the storage unit 43₁ through the interface unit 47₁. In step SR3, the receiving control unit 44₁, like in step SK3 (see Fig. 8), performs the process for
20 synchronously reproducing the stream information JS and the storage-type information JT.

As described above, according to the fourth embodiment, the effect similar to that of the first embodiment is obtained, while at the same time reducing the effect of a transmission
25 delay in the network N in view of the fact that the stream

information JS and the storage-type information JT are distributed from the same stream server 10.

In the first embodiment described above, the storage-type information JT shown in Fig. 1 is stored beforehand in the storage unit 21, and distributed to the clients 40₁ to 40_n from the storage-type information server 20. As an alternative, the storage-type information JT may be distributed to the clients 40₁ to 40_n from the storage-type information server 20 before the synchronous reproduction. The latter case will be described in detail below as a fifth embodiment.

Now, the operation of the fifth embodiment will be explained with reference to the flowchart of Fig. 12. In Fig. 1, the stream server 10, the storage-type information server 20 and the clients 40₁ to 40_n, when activated, proceed to steps SS1, ST1 and SV1, respectively, shown in Fig. 12. In step SS1, the distribution control unit 13 of the stream server 10 of Fig. 2 determines whether an instruction is given by the sync control server 30 to distribute the stream information JS. In the case under consideration, the determination is NO, and the process for determination is repeated. In step ST1, the storage-type information server 20 determines whether an instruction is given from the sync control server 30 to distribute the storage-type information JT to the clients 40₁ to 40_n. In this case, the answer is NO, and the same process for determination is repeated.

1
In step SV1, on the other hand, the clients 40₁ to 40_m determine whether the storage-type information JT has been received from the storage-type information server 20. In the case under consideration, the answer is NO, and the same process
5 for determination is repeated. In the description that follows, main emphasis will be placed on the explanation of the operation of the client 40₁ shown in Fig. 5 since the operation of the clients 40₂ (not shown) to 40_m is similar to that of the client 40₁. Thus, in step SV1, the receiving control unit 44₁ of the
10 client 40₁ shown in Fig. 5 determines whether the storage-type information JT has been received or not. In the case under consideration, the determination is NO, and the process for determination is repeated.

Assume that the distributor has input the information
15 instructing to start distribution by way of the input device 33 shown in Fig. 3. The sync control unit 34 of the sync control server 30 proceeds to step SU1. In step SU1, the sync control unit 34 reads the server information J₁ shown in Fig. 4A and the sync reproduction information J₂ shown in Fig. 4C from the
20 storage unit 31. Then, the sync control unit 34 recognizes the "server IP address" ("11.2.3.199" in this case) of the storage-type information server (the storage-type server 20 in this case) holding the storage-type information JT, from the server information J₁ shown in Fig. 4A.

25 Then, the sync control unit 34 recognizes the information

5 ("server name", "client name", "contents name", "sync time")
for the stream information JS and the storage-type information
JT to be reproduced, from the sync reproduction information J_s,
shown in Fig. 4C. The sync control unit 34 thus instructs the
storage-type information sever 20 to distribute the
storage-type information JT based on the server IP address
"11.2.3.199", and then proceeds to step SU2.

As a result, the storage-type information server 20
determines the answer in step ST1 as YES and proceeds to step
ST2. In step ST2, the storage-type information server 20 reads
the storage-type information JT from the storage unit 21, and
distributes it to the multicast address "239.0.10.199", i.e.
the clients 40₁ to 40_n.

Upon receipt of the storage-type information JT, the
receiving control unit 44₁ of the client 40₁ shown in Fig. 5
determines the answer in step SV1 as YES, and proceeds to step
SV2. In step SV2, the receiving control unit 44₁ stores the
received storage-type information JT in the storage unit 43₁,
and then proceeds to step SV3. In step SV3, the receiving
control unit 44₁ determines whether a receive/reproduce
instruction is given from the sync control server 30. In the
case under consideration, the determination is NO, and the same
process for determination is repeated.

In step SU2, on the other hand, the sync control unit 34
of the sync control server 30 shown in Fig. 3 recognizes the

Fig. 4B) from the storage unit 31, and then gives a receive/reproduce instruction to the clients 40₁ to 40_m based on the client information J₂. In this case, the receive/reproduce instruction is to receive the stream information JS transmitted to the multicast address "239.0.10.100", to reproduce the stream information JS in real time, and to synchronously reproduce the storage-type information JT and the stream information JS at the sync time ("05'20").

Upon receipt of the receive/reproduce instruction, the receiving control unit 44₁ of the client 40₁ shown in Fig. 5 determines the answer in step SV3 as YES, and proceeds to step SV4. In step SV4, the receiving control unit 44₁ performs the process of synchronous reproduction. Specifically, the receiving control unit 44₁ starts receiving the stream information JS transmitted to the multicast address "239.0.10.100" while at the same time reading the storage-type information JT from the storage unit 43₁.

The receiving control unit 44₁ reproduces the stream information JS in real time, and monitors whether the relative time based on the real time reproduction start time described above as a reference time has come to coincide with the sync time ("05'20") for the storage-type information JT. Once the relative time has come to coincide with the sync time ("05'20"), the receiving control unit 44₁ outputs the storage-type

information JT to the display unit 41₁. As a result, in the display unit 41₁, the storage-type information JT for "contents B" is synchronously reproduced in temporal synchronism with the stream information JS.

5 As described above, according to the fifth embodiment,
an effect similar to that of the first embodiment is obtained.
At the same time, in view of the fact that the storage-type
information JT is distributed to the clients 40₁ to 40_n from
the storage-type information server 20 before synchronous
10 reproduction, the effect of the transmission delay in the
network N can be reduced.

In the first embodiment described above, the storage-type information JT shown in Fig. 1 is stored beforehand in the storage unit 21, and distributed to the clients 40₁ to 40_m from the storage-type information server 20. Alternatively, the storage-type information JT is held in the stream server 10, and transmitted to the storage-type server 20 from the stream server 10 before synchronous reproduction, followed by being distributed from the storage-type information server 20. In the description that follows, a sixth embodiment referring to the latter case will be explained in detail.

According to the sixth embodiment, the storage unit 11 shown in Fig. 1 has stored therein the storage-type information JT. Further, the "server name" of the server information J₁ shown in Fig. 4A of the sixth embodiment is "stream server"

instead of "storage-type information server" shown in the drawing. Further, the "server name" for the storage-type information JT shown in Fig. 4C in the second embodiment is changed from the "storage-type information server" shown in the drawing to "stream server".

Now, the operation of the sixth embodiment will be explained with reference to the flowchart of Fig. 13. In Fig. 1, the stream server 10, the storage-type information server 20 and the clients 40₁ to 40_n, once activated, proceed to steps SW1, SX1 and SZ1, respectively, shown in Fig. 13.

In step SW1, the distribution control unit 13 of the stream server 10 shown in Fig. 2 determines whether an instruction is given by the sync control server 30 to transmit the storage-type information JT to the storage-type information server 20 or not. In the case under consideration, the answer is NO, and the same process for determination is repeated. In step SX1, on the other hand, the storage-type information server 20 determines whether the storage-type information JT has been received from the stream server 10 or not. In this case, the answer is NO, and the same process for determination is repeated.

In step SZ1, the clients 40₁ to 40_n determine whether a receive/reproduce instruction has been given by the sync control server 30. In the case under consideration, the determination is NO, and the same process for determination is

repeated. In the description that follows, main emphasis will be placed on the operation of the client 40₁ shown in Fig. 5 since the operation of the clients 40₂ (not shown) to 40_m is similar to that of the client 40₁.

5 In this case, in step SZ1, the receiving control unit 44₁ of the client 40₁ shown in Fig. 5 determines whether a receive/reproduce instruction has been received from the sync control server 30 or not. When the distributor inputs the information for instructing to start distribution using the
10 input device 33 shown in Fig. 3, the sync control unit 34 of the sync control server 30 proceeds to step SY1. In step SY1, the sync control unit 34 reads the server information J₁ shown in Fig. 4A and the sync reproduction information J₃ shown in Fig. 4C from the storage unit 31. Then, the sync control unit
15 34 recognizes the "server IP address" ("11.2.3.100" in this case) of the stream server (the stream server 10 in this case) holding the storage-type information JT, from the service information J₁ shown in Fig. 4A.

 Then, the sync control unit 34 recognizes the information
20 ("server name", "client name", "contents name", "sync time") for the stream information JS and the storage-type information JT to be synchronously reproduced, from the sync reproduction information J₃ shown in Fig. 4C. The sync control unit 34, after issuing an instruction to the stream server 10 to transmit the
25 storage-type information JT, based on the server IP address

"11.2.3.100", proceeds to step SY2.

As a result, the distribution control unit 13 of the stream server 10 shown in Fig. 2 determines the answer in step SW1 as YES and proceeds to step SW2. In step SW2, the distribution control unit 13 reads the storage-type information JT from the storage unit 11, and transmits it to the storage-type information server 20, after which the process proceeds to step SW3. In step SW3, the distribution control unit 13 determines whether an instruction is given by the sync control server 30 to distribute the stream information JS or not. In the case under consideration, the determination is NO, and the same process for determination is repeated.

Upon receipt of the storage-type information JT, the storage-type information server 20 determines the answer in step SX1 as YES, and proceeds to step SX2. In step SX2, the storage-type information server 20 stores the received storage-type information JT in the storage unit 21, and then proceeds to step SX3. In step SX3, the storage-type information server 20 determines whether an instruction is given by the sync control server 30 to distribute the storage-type information JT. In the case under consideration, the determination is NO, and the same process for determination is repeated.

In step SY2, the sync control unit 34 of the sync control server 30 shown in Fig. 3 recognizes the information ("server name", "contents name", "sync time") for the stream information

JS and the storage-type information JT to be synchronously reproduced, from the sync reproduction information J₃ shown in Fig. 4C. Then, the sync control unit 34 recognizes the "stream server" (the stream server 10) and the "storage-type
5 information server" (the storage-type information server 20) for distributing the stream information JS and the storage-type information JT, from the server information J₁ shown in Fig. 4A.

Further, the sync control unit 34 recognizes the
10 "multicast address" ("239.0.10.100") of the destination of distribution of the stream information JS and the "multicast address" ("239.0.10.199") of the destination of distribution of the storage-type information JT, respectively, from the server information J₁. Then, the sync control unit 34 instructs
15 the stream server 10, through the network N, to distribute the stream information JS for "contents A" to the multicast address "239.0.10.100". Concurrently with this instruction, the sync control unit 34 instructs the storage-type information server 20, through the network N, to transmit the storage-type
20 information JT for "contents B" to the multicast address "239.0.10.199" and to set the sync time at "05'20", after which the process proceeds to step SY3.

As a result, the distribution control unit 13 of the stream server 10 shown in Fig. 2 determines the answer in step
25 SW3 as YES, and proceeds to step SW4. In step SW4, the

distribution control unit 13 distributes the stream information JS for "contents A". Specifically, the distribution control unit 13 transmits the stream information JS with a time stamp attached thereto, which is generated based on the animation data D₁ and the audio data D₂, to the multicast address "239.0.10.100" (see Fig. 4A) through the network control unit 14 and the network N, after which the process proceeds to step SW5.

The stream information JS with a time stamp added thereto is distributed to the clients 40₁ to 40_m corresponding to the multicast address "239.0.10.100". In step SW5, the distribution control unit 13 determines whether the distribution of the stream information JS and the storage-type information JT has been complete or not, and until the distribution is complete, keeps the determination at NO.

Upon receipt of an instruction for distribution from the sync control unit 34 of the sync control server 30, the storage-type server 20 determines the answer in step SX3 as YES, and proceeds to step SX4. In step SX4, the storage-type information server 20 first reads the storage-type information JT from the storage unit 21. Then, the storage-type information server 20 transmits the storage-type information JT with the sync time information thereto corresponding to the sync time ("05'20", see Fig 4C) designated by the sync control unit 34, to the multicast address "239.0.10.199" (see Fig. 4A) through the network N, and then proceeds to step SX5.

As a result, the storage-type information JT with the sync time information added thereto is distributed to the clients 40₁ to 40_n corresponding to the multicast address "239.0.10.199". In step SX5, the storage-type information server 20 determines
5 whether the distribution of the storage-type information JT is complete or not, and until the distribution is complete, keeps the determination at NO.

In step SY3, on the other hand, the sync control unit 34 of the sync control server 30 shown in Fig. 3 reads the client
10 information J₂ (see Fig. 4B) from the storage unit 31, and then based on the client information J₂, gives a receive/reproduce instruction to the clients 40₁ to 40_n. This receive/reproduce instruction is to receive the stream information JS transmitted to the multicast address "239.0.10.100", to reproduce the
15 stream information JS in real time, to receive the storage-type information JT transmitted to the multicast address "239.0.10.199" and to synchronously reproduce the storage-type information JT and the stream information JS at the sync time ("05'20").

Upon receipt of a receive/reproduce instruction, the
20 receiving control unit 44₁ of the client 40₁ shown in Fig. 5 determines the answer in step SZ1 as YES, and proceeds to step SZ2. In step SZ2, the receiving control unit 44₁ starts receiving the stream information JS transmitted to the
25 multicast address "239.0.10.100". In similar fashion, the

receiving control unit 44₁ starts receiving the storage-type information JT transmitted to the multicast address "239.0.10.199", and stores (accumulates) the received storage-type information JT in the storage unit 43₁ through the interface unit 47₁. In step SZ3, the receiving control unit 44₁, like in step SK3 (see Fig. 8), performs the process of synchronously reproducing the stream information JS and the storage-type information JT.

As explained above, according to the sixth embodiment, like in the first embodiment, the stream information JS and the storage-type information JT are both synchronously reproduced in the clients 40₁ to 40_n under the control of the sync control server 30, and therefore as compared with the prior art in which only the stream information JS is reproduced in real time, an information distribution service with a high added value can be provided.

The first to sixth embodiments of the present invention were described in detail above with reference to the drawings. Specific examples of configuration, however, are not limited to the first to sixth embodiments but any design change or modifications not departing from the spirit and scope of the present invention are also included in the present invention.

As an example, in the first to sixth embodiments described above, an information distribution control program or an information reproduction control program for realizing the

functions described above is recorded in the computer readable recording medium 200 shown in Fig. 14, and the information distribution control program or the information reproduction control program recorded in the recording medium 200 can be
5 executed by being read into the computer 100. The information distribution control program is a program for realizing the function of the sync control server 30 shown in Fig. 1, and the information reproduction control program is a program for executing the functions of the clients 40₁ to 40_n.

10 The computer 100 shown in Fig. 14 includes a CPU 101 for executing the information distribution control program (or the information reproduction control program) described above, an input device 102 such as a keyboard and a mouse, a ROM (read-only memory) 103 for storing various data, a RAM (random access
15 memory) 104 for storing arithmetic parameters, etc., a reader 105 for reading the information distribution control program from the recording medium 200, an output device 106 such as a display unit and a printer, and a bus BU for connecting the various parts.

20 The CPU 101, after reading the information distribution control program from the recording medium 200 through the reader 105, executes the particular information distribution control program and thereby controls the distribution of the stream information JS and the storage-type information JT. Further,
25 the CPU 101, after reading the information reproduction control

program from the recording medium 200, executes the particular information reproduction control program and thereby synchronously reproduces the stream information JS and the storage-type information JT described above. The recording
5 medium 200 includes a transmission medium such as a network for recording and holding data temporarily, as well as an optical disk, a floppy disk, a hard disk or the like portable recording medium.

In the examples described in the first to sixth
10 embodiments, the multicast scheme is used as a communication method. The present invention, however, is not limited to such a scheme but any communication scheme can be employed as far as it is intended for synchronous reproduction of the stream information and the storage-type information. According to
15 the first to sixth embodiments, therefore, instead of the multicast scheme, it is possible to employ a broadcast scheme (simultaneous broadcast communication scheme) for transmitting information to a multiplicity of unspecified clients at a time, or a unicast scheme (single-host
20 transmission-type communication scheme) for transmitting information to a single client with equal effect.

Further, the first to sixth embodiments refer to the case of a configuration comprising one unit each of a stream server
10, a storage-type information server 20 and a sync control
25 server 30. As an alternative, a plurality of stream servers

10, storage-type information servers 20 and sync control servers 30 can be provided to distribute the load among a plurality of units corresponding to the number of the clients 40, to 40_n.

5 Further, in the first to sixth embodiments, a plurality of stream servers 10 and a plurality of storage-type information servers 20 can be provided to distribute the stream information JS and the storage-type information JT for a plurality of types of contents.

10 In addition, according to the first to sixth embodiments,
an explanation was made of a case using the storage-type
information JT held on the stream server 10 side or on the
storage-type information server 20 side. The present
invention is not confined to such a case, but the storage-type
15 information JT and the stream information JS may be
synchronously reproduced by use of the storage-type information
JT held in the WWW (world wide web).

As described above, according to one aspect of the present invention, the stream information and the storage-type information are both synchronously reproduced in the receivers, and therefore as compared with the prior art in which only the stream information is reproduced in real time, an information distribution service high in added value can be provided.

According to another aspect of the present invention, the
25 storage-type information is held in the stream information

distribution apparatus, so that the stream information and the storage-type information are both distributed from the same stream information distribution apparatus, and therefore the effect of transmission delay is reduced.

5 According to still another aspect of the present
invention, the storage-type information is downloaded to the
stream information distribution apparatus in advance, and the
stream information and the storage-type information are
distributed from the same stream information distribution
10 apparatus. Therefore, the effect of transmission delay can be
reduced.

According to still another aspect of the present invention, the stream information and the storage-type information are both synchronously reproduced in the receiver, and therefore as compared with the prior art in which only the stream information is reproduced in real time, an information distribution server with a higher added value can be provided. Further, the storage-type information is held in advance in the receivers, and therefore the transmission of the storage-type information is not required, thereby eliminating the effect of transmission delay.

According to still another aspect of the present invention, the storage-type information is downloaded beforehand to the receivers, and therefore the transmission of
25 the storage-type information is not required, thereby

eliminating the effect of transmission delay.

Although the invention has been described with respect to a specific embodiment for a complete and clear disclosure, the appended claims are not to be thus limited but are to be
5 construed as embodying all modifications and alternative constructions that may occur to one skilled in the art which fairly fall within the basic teaching herein set forth.

09515226-030600

1. **NAME** _____
 2. **ADDRESS** _____
 3. **CITY** _____
 4. **STATE** _____
 5. **ZIP** _____
 6. **PHONE** _____
 7. **DATE** _____
 8. **SIGNATURE** _____
 9. **PRINT NAME** _____
 10. **PRINT ADDRESS** _____
 11. **PRINT CITY** _____
 12. **PRINT STATE** _____
 13. **PRINT ZIP** _____
 14. **PRINT PHONE** _____
 15. **PRINT DATE** _____
 16. **PRINT SIGNATURE** _____
 17. **PRINT NAME** _____
 18. **PRINT ADDRESS** _____
 19. **PRINT CITY** _____
 20. **PRINT STATE** _____
 21. **PRINT ZIP** _____
 22. **PRINT PHONE** _____
 23. **PRINT DATE** _____
 24. **PRINT SIGNATURE** _____
 25. **PRINT NAME** _____
 26. **PRINT ADDRESS** _____
 27. **PRINT CITY** _____
 28. **PRINT STATE** _____
 29. **PRINT ZIP** _____
 30. **PRINT PHONE** _____
 31. **PRINT DATE** _____
 32. **PRINT SIGNATURE** _____
 33. **PRINT NAME** _____
 34. **PRINT ADDRESS** _____
 35. **PRINT CITY** _____
 36. **PRINT STATE** _____
 37. **PRINT ZIP** _____
 38. **PRINT PHONE** _____
 39. **PRINT DATE** _____
 40. **PRINT SIGNATURE** _____
 41. **PRINT NAME** _____
 42. **PRINT ADDRESS** _____
 43. **PRINT CITY** _____
 44. **PRINT STATE** _____
 45. **PRINT ZIP** _____
 46. **PRINT PHONE** _____
 47. **PRINT DATE** _____
 48. **PRINT SIGNATURE** _____
 49. **PRINT NAME** _____
 50. **PRINT ADDRESS** _____
 51. **PRINT CITY** _____
 52. **PRINT STATE** _____
 53. **PRINT ZIP** _____
 54. **PRINT PHONE** _____
 55. **PRINT DATE** _____
 56. **PRINT SIGNATURE** _____
 57. **PRINT NAME** _____
 58. **PRINT ADDRESS** _____
 59. **PRINT CITY** _____
 60. **PRINT STATE** _____
 61. **PRINT ZIP** _____
 62. **PRINT PHONE** _____
 63. **PRINT DATE** _____
 64. **PRINT SIGNATURE** _____
 65. **PRINT NAME** _____
 66. **PRINT ADDRESS** _____
 67. **PRINT CITY** _____
 68. **PRINT STATE** _____
 69. **PRINT ZIP** _____
 70. **PRINT PHONE** _____
 71. **PRINT DATE** _____
 72. **PRINT SIGNATURE** _____
 73. **PRINT NAME** _____
 74. **PRINT ADDRESS** _____
 75. **PRINT CITY** _____
 76. **PRINT STATE** _____
 77. **PRINT ZIP** _____
 78. **PRINT PHONE** _____
 79. **PRINT DATE** _____
 80. **PRINT SIGNATURE** _____
 81. **PRINT NAME** _____
 82. **PRINT ADDRESS** _____
 83. **PRINT CITY** _____
 84. **PRINT STATE** _____
 85. **PRINT ZIP** _____
 86. **PRINT PHONE** _____
 87. **PRINT DATE** _____
 88. **PRINT SIGNATURE** _____
 89. **PRINT NAME** _____
 90. **PRINT ADDRESS** _____
 91. **PRINT CITY** _____
 92. **PRINT STATE** _____
 93. **PRINT ZIP** _____
 94. **PRINT PHONE** _____
 95. **PRINT DATE** _____
 96. **PRINT SIGNATURE** _____
 97. **PRINT NAME** _____
 98. **PRINT ADDRESS** _____
 99. **PRINT CITY** _____
 100. **PRINT STATE** _____
 101. **PRINT ZIP** _____
 102. **PRINT PHONE** _____
 103. **PRINT DATE** _____
 104. **PRINT SIGNATURE** _____
 105. **PRINT NAME** _____
 106. **PRINT ADDRESS** _____
 107. **PRINT CITY** _____
 108. **PRINT STATE** _____
 109. **PRINT ZIP** _____
 110. **PRINT PHONE** _____
 111. **PRINT DATE** _____
 112. **PRINT SIGNATURE** _____
 113. **PRINT NAME** _____
 114. **PRINT ADDRESS** _____
 115. **PRINT CITY** _____
 116. **PRINT STATE** _____
 117. **PRINT ZIP** _____
 118. **PRINT PHONE** _____
 119. **PRINT DATE** _____
 120. **PRINT SIGNATURE** _____
 121. **PRINT NAME** _____
 122. **PRINT ADDRESS** _____
 123. **PRINT CITY** _____
 124. **PRINT STATE** _____
 125. **PRINT ZIP** _____
 126. **PRINT PHONE** _____
 127. **PRINT DATE** _____
 128. **PRINT SIGNATURE** _____
 129. **PRINT NAME** _____
 130. **PRINT ADDRESS** _____
 131. **PRINT CITY** _____
 132. **PRINT STATE** _____
 133. **PRINT ZIP** _____
 134. **PRINT PHONE** _____
 135. **PRINT DATE** _____
 136. **PRINT SIGNATURE** _____
 137. **PRINT NAME** _____
 138. **PRINT ADDRESS** _____
 139. **PRINT CITY** _____
 140. **PRINT STATE** _____
 141. **PRINT ZIP** _____
 142. **PRINT PHONE** _____
 143. **PRINT DATE** _____
 144. **PRINT SIGNATURE** _____
 145. **PRINT NAME** _____
 146. **PRINT ADDRESS** _____
 147. **PRINT CITY** _____
 148. **PRINT STATE** _____
 149. **PRINT ZIP** _____
 150. **PRINT PHONE** _____
 151. **PRINT DATE** _____
 152. **PRINT SIGNATURE** _____
 153. **PRINT NAME** _____
 154. **PRINT ADDRESS** _____
 155. **PRINT CITY** _____
 156. **PRINT STATE** _____
 157. **PRINT ZIP** _____
 158. **PRINT PHONE** _____
 159. **PRINT DATE** _____
 160. **PRINT SIGNATURE** _____
 161. **PRINT NAME** _____
 162. **PRINT ADDRESS** _____
 163. **PRINT CITY** _____
 164. **PRINT STATE** _____
 165. **PRINT ZIP** _____
 166. **PRINT PHONE** _____
 167. **PRINT DATE** _____
 168. **PRINT SIGNATURE** _____
 169. **PRINT NAME** _____
 170. **PRINT ADDRESS** _____
 171. **PRINT CITY** _____
 172. **PRINT STATE** _____
 173. **PRINT ZIP** _____
 174. **PRINT PHONE** _____
 175. **PRINT DATE** _____
 176. **PRINT SIGNATURE** _____
 177. **PRINT NAME** _____
 178. **PRINT ADDRESS** _____
 179. **PRINT CITY** _____
 180. **PRINT STATE** _____
 181. **PRINT ZIP** _____
 182. **PRINT PHONE** _____
 183. **PRINT DATE** _____
 184. **PRINT SIGNATURE** _____
 185. **PRINT NAME** _____
 186. **PRINT ADDRESS** _____
 187. **PRINT CITY** _____
 188. **PRINT STATE** _____
 189. **PRINT ZIP** _____
 190. **PRINT PHONE** _____
 191. **PRINT DATE** _____
 192. **PRINT SIGNATURE** _____
 193. **PRINT NAME** _____
 194. **PRINT ADDRESS** _____
 195. **PRINT CITY** _____
 196. **PRINT STATE** _____
 197. **PRINT ZIP** _____
 198. **PRINT PHONE** _____
 199. **PRINT DATE** _____
 200. **PRINT SIGNATURE** _____
 201. **PRINT NAME** _____
 202. **PRINT ADDRESS** _____
 203. **PRINT CITY** _____
 204. **PRINT STATE** _____
 205. **PRINT ZIP** _____
 206. **PRINT PHONE** _____
 207. **PRINT DATE** _____
 208. **PRINT SIGNATURE** _____
 209. **PRINT NAME** _____
 210. **PRINT ADDRESS** _____
 211. **PRINT CITY** _____
 212. **PRINT STATE** _____
 213. **PRINT ZIP** _____
 214. **PRINT PHONE** _____
 215. **PRINT DATE** _____
 216. **PRINT SIGNATURE** _____
 217. **PRINT NAME** _____
 218. **PRINT ADDRESS** _____
 219. **PRINT CITY** _____
 220. **PRINT STATE** _____

a first time information addition control unit which adds
a first time information to a stream information distributed

a second time information addition control unit which adds the second time information to the storage-type information distributed to said receiver; and

15

wherein the storage-type information is held in said stream information distribution apparatus,

20

25

information added thereto and the storage-type information with the second time information added thereto to said receiver through a network.

- 5 3. The information distribution control system according to claim 2, further comprising:

a download unit which downloads the storage-type information to said stream information distribution apparatus in advance.

10

4. An information distribution control system comprising:

a time information addition control unit which adds a time information to a stream information distributed from a stream information distribution apparatus to a receiver and capable

- 15 of being reproduced in real time;

a synchronous reproduction control unit which controls said receiver in such a manner as to reproduce the stream information and the storage-type information held in said receiver, in temporal synchronism with each other based on the

- 20 time information.

5. The information distribution control system according to claim 4, further comprising:

a download unit which downloads the storage-type information to said receiver in advance.

25

information distributed to said receiver; and

controlling said receiver in such a manner as to reproduce the stream information and the storage-type information in temporal synchronism with each other based on the first time
5 information and the second time information.

8. A computer readable recording medium which records an information distribution control program for making a computer execute a process comprising the steps of:

10 adding a first time information to a stream information distributed from a stream information distribution apparatus to a receiver and capable of being reproduced in real time;

adding a second time information to a storage-type information distributed to said receiver; and

15 controlling said receiver in such a manner as to reproduce the stream information and the storage-type information in temporal synchronism with each other based on the first time information and the second time information.

20 9. An information reproduction apparatus comprising:

a first receiver which receives a stream information with a first time information added thereto and capable of being reproduced in real time;

a second receiver which receives a storage-type
25 information with a second time information added thereto; and

a synchronous reproduction unit which reproduces the stream information and the storage-type information in temporal synchronism with each other based on the first time information and the second time information.

5

10. A computer readable recording medium which records an information reproduction control program for making a computer execute a process comprising the steps of:

receiving a stream information with a first time
10 information added thereto and capable of being reproduced in
real time;

receiving a storage-type information with a second time information added thereto; and

reproducing the stream information and the storage-type
15 information in temporal synchronism with each other based on
the first time information and the second time information.

ABSTRACT OF THE DISCLOSURE

In an information distribution control system, a sync control server adds a time stamp to the stream information JS capable of being reproduced in real time and adds the sync time
5 information to the storage-type information JT, so that the stream information JS and the storage-type information JT are reproduced in temporal synchronism with each other based on the time stamp and the sync time information in a plurality of clients.

FIG.1

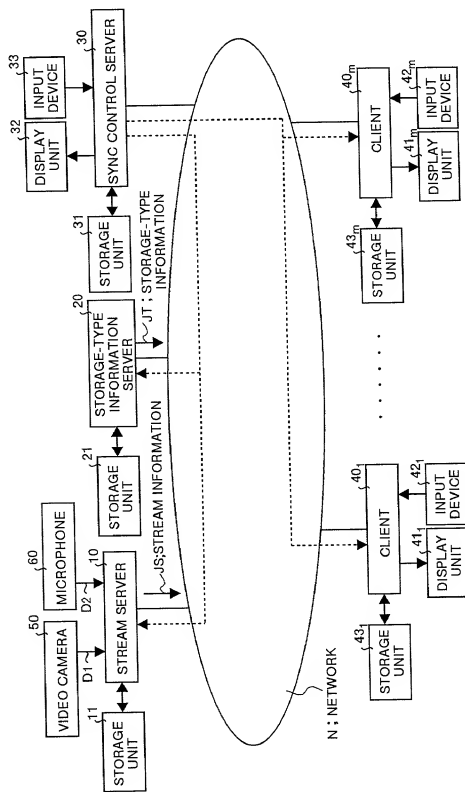


FIG.2


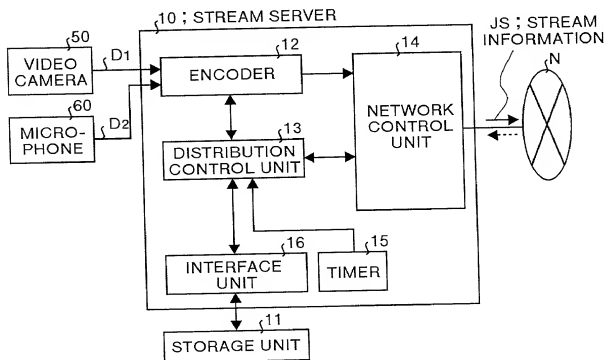


FIG.3

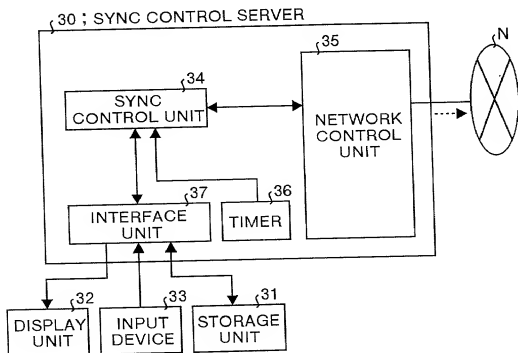

J1 ; SERVER INFORMATION

CLIENT INFORMATION

FIG.4C

J3 : SYNC REPRODUCTION INFORMATION

STREAM INFORMATION JS		STORAGE-TYPE INFORMATION JT		
SERVER NAME	CONTENTS NAME	SERVER NAME	CONTENTS NAME	SYNC TIME
STREAM SERVER	CONTENTS A	STORAGE-TYPE INFORMATION SERVER	CONTENTS B	05'20

FIG.5

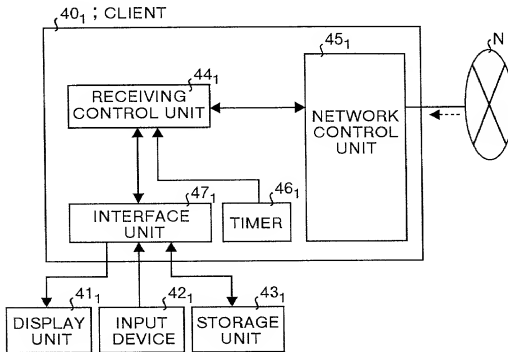


FIG. 6


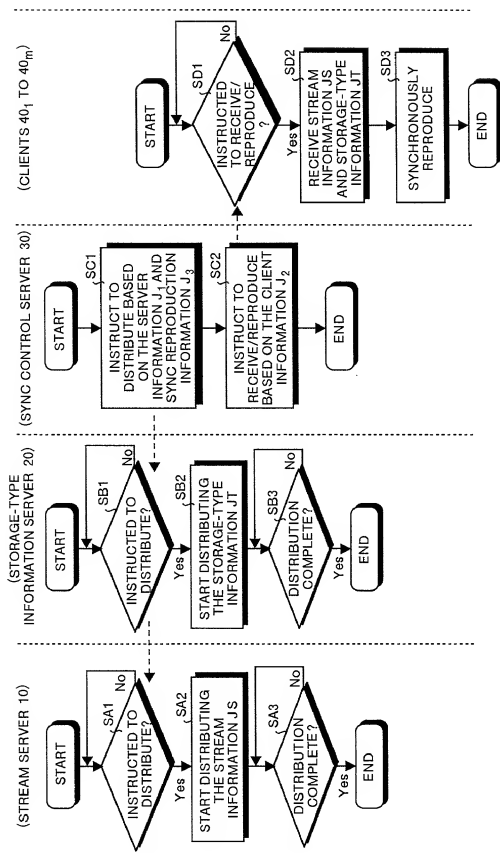


FIG. 7

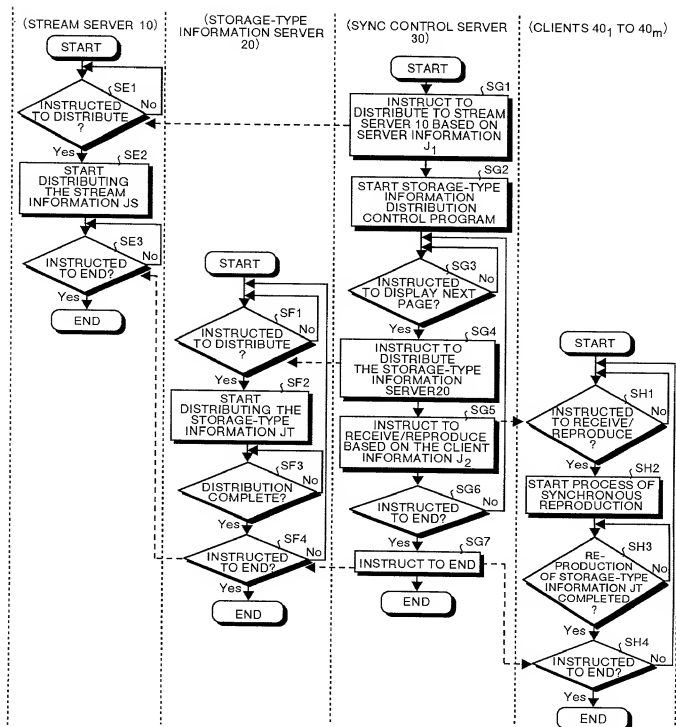

09519526-030600

FIG.8


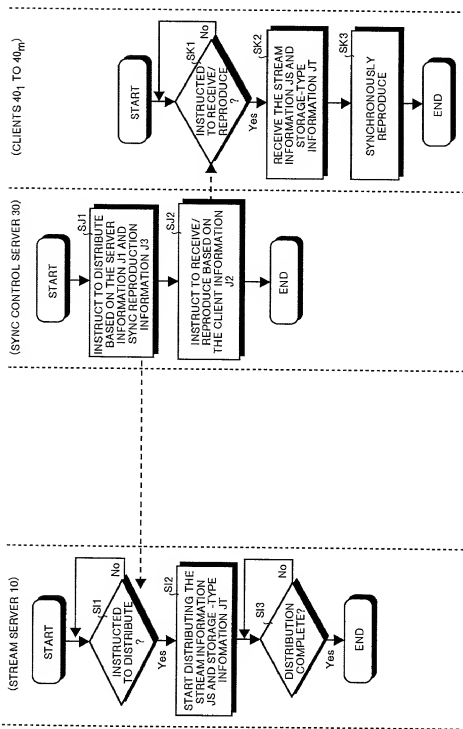


FIG.9

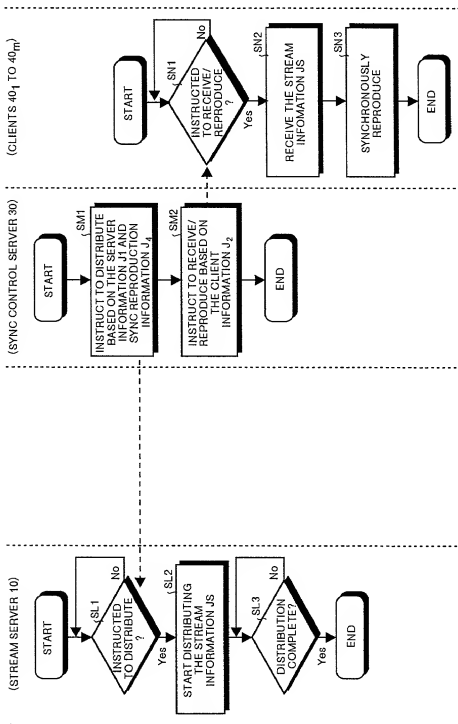

J4 : SYNC REPRODUCTION INFORMATION

STREAM INFORMATION JS		STORAGE-TYPE INFORMATION JT		
SERVER NAME	CONTENTS NAME	CLIENT NAME	CONTENTS NAME	SYNC TIME
STREAM SERVER	CONTENTS A	CLIENT 1 TO m	CONTENTS B	05'20

FIG.11

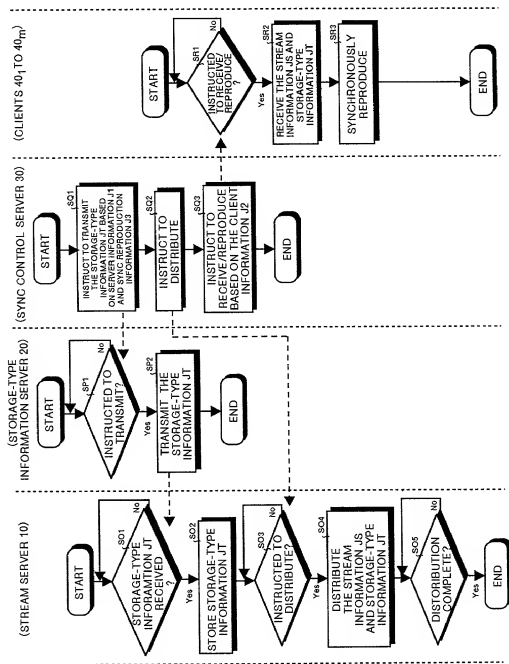


FIG.12

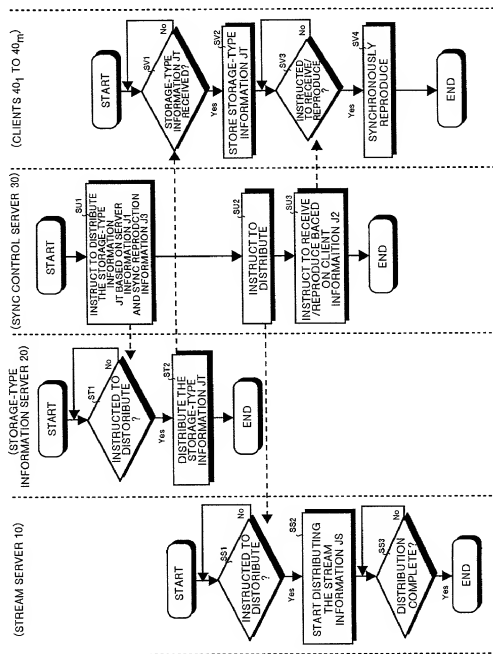


FIG. 13


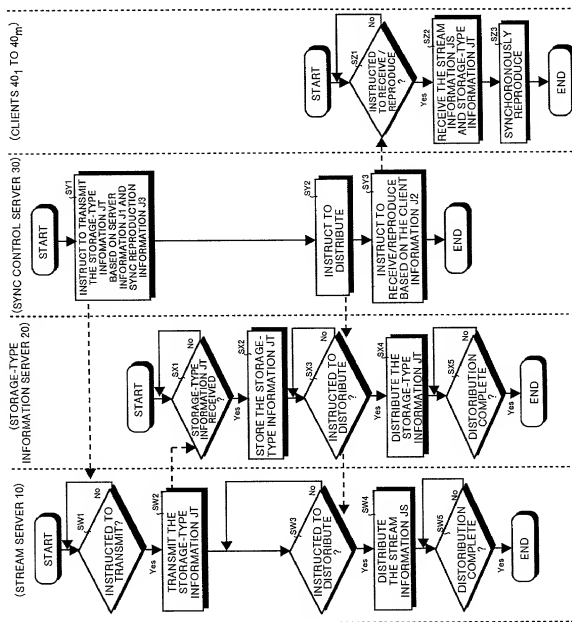


FIG.14

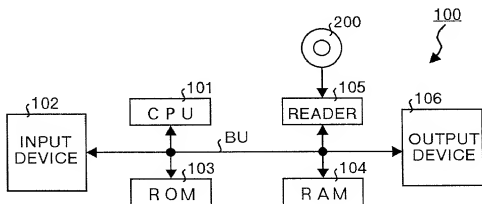

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

Declaration and Power of Attorney For Patent Application

特許出願宣言書及び委任状

Japanese Language Declaration

日本語宣言書

下記の氏名の発明者として、私は以下の通り宣言します。

As a below named inventor, I hereby declare that:

私の住所、私書箱、国籍は下記の私の氏名の後に記載され
た通りです。

My residence, post office address and citizenship are as stated
next to my name.

下記の名称の発明に関して請求範囲に記載され、特許出願
している発明内容について、私が最初かつ唯一の発明者（下
記の氏名が一つの場合）もしくは最初かつ共同発明者である
と（下記の名称が複数の場合）信じています。

I believe I am the original, first and sole inventor (if only one name
is listed below) or an original, first and joint inventor (if plural
names are listed below) of the subject matter which is claimed and
for which a patent is sought on the invention entitled

INFORMATION DISTRIBUTION CONTROL SYSTEM, INFORMATION
DISTRIBUTION CONTROL METHOD, COMPUTER READABLE

RECORDING MEDIUM FOR RECORDING INFORMATION DISTRIBUTION
CONTROL PROGRAM, INFORMATION REPRODUCTION APPARATUS, AND

COMPUTER READABLE RECORDING MEDIUM FOR RECORDING
INFORMATION REPRODUCTION CONTROL PROGRAM

上記発明の明細書（下記の欄でx印がついていない場合は、
本書に添付）は、

the specification of which is attached hereto unless the following
box is checked:

☐ 月 日 に提出され、米国出願番号または特許協定条約
国際出願番号を _____ とし、
（該当する場合） _____ に訂正されました。

☐ was filed on _____
as United States Application Number or
PCT International Application Number
_____ and was amended on
_____ (if applicable).

私は、特許請求範囲を含む上記訂正後の明細書を検討し、
内容を理解していることをここに表明します。

I hereby state that I have reviewed and understand the contents of
the above identified specification, including the claims, as
amended by any amendment referred to above.

私は、連邦規則法第37編第1条56項に定義されると
おり、特許資格の有無について重要な情報を開示する義務が
あることを認めます。

I acknowledge the duty to disclose information which is material to
patentability as defined in Title 37, Code of Federal Regulations,
Section 1.56.

Page 1 of

Burden Hour Statement: This form is estimated to take 0.4 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Commissioner of Patents and Trademarks, Washington, DC 20231.

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

Japanese Language Declaration (日本語宣言書)

私は、米国法典第35編119条(a)-(d)項又は365条(b)項に基づき下記の、米国以外の国の少なくとも一か国を指定している特許協力条約365(a)項に基づき国際出願、又は外国での特許出願もしくは発明者証の出願についての外国優先権をここに主張するとともに、優先権を主張している、本出願の前に出願された発明者証の外国出願を以下に、枠内をマークすることで、示しています。

Prior Foreign Application(s)

外国での先行出願

11-225741	Japan
(Number)	(Country)
(番号)	(国名)
(Number)	(Country)
(番号)	(国名)

私は、第35編米国法典119条(e)項に基づいて下記の米国外特許出願規定に記載された権利をここに主張いたします。

(Application No.)	(Filing Date)
(出願番号)	(出願日)

私は、下記の米国法典第35編120条に基づいて下記の米国外特許出願に記載された権利、又は米国を指定している特許協力条約365条(c)項に基づき権利をここに主張します。また、本出願の各請求範囲の内容が米国法典第35編112条第1項又は特許協力条約で規定された方法で先行する米国外特許出願に開示されていない限り、その先行米国出願書提出日以降で本出願書の日本国内または特許協力条約国際提出日までの期間中に入手された、連邦規則法典第37編1.56項で定義された特許資格の有無に関する重要な情報について開示義務があることを認識しています。

(Application No.)	(Filing Date)
(出願番号)	(出願日)

(Application No.)	(Filing Date)
(出願番号)	(出願日)

私は、私自身の知識に基づいて本宣言書中で私が行なう表明が真実であり、かつ私の入手した情報と私の信じるところに基きく表明が全て真実であると信じていること、さらに故意になされた虚偽の表明及びそれと同等の行為は米国法典第18編第1001条に基づき、罰金または拘禁、もしくはその両方により処罰されること、そしてそのような故意による虚偽の表明を行なえば、出願した、又は既に許可された特許の有効性が失われることを認識し、よってここに上記のごとく宣誓を致します。

I hereby claim foreign priority under Title 35, United States Code, Section 119 (a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or 366(a) of any PCT international application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or PCT international application having a filing date before that of the application on which priority is claimed.

Priority Not Claimed

優先権主張なし

9/August/1999
(Day/Month/Year Filed)
(出願年月日)
(Day/Month/Year Filed)
(出願年月日)

I hereby claim the benefit under Title 35, United States Code, Section 119(e) of any United States provisional application(s) listed below.

(Application No.)	(Filing Date)
(出願番号)	(出願日)

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s), or 366(c) of any PCT international application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT international application in the manner provided by the first paragraph of Title 35, United States Code Section 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.88 which became available between the filing date of the prior application and the national or PCT international filing date of application.

(Status: Patented, Pending, Abandoned)
(現況: 特許許可済、係属中、放棄済)

(Status: Patented, Pending, Abandoned)
(現況: 特許許可済、係属中、放棄済)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Japanese Language Declaration (日本語宣言書)

委任状: 私は下記の発明者として、本出願に関する一切の手続きを米特許商標局に対して遂行する弁理士または代理人として、下記の者を指名いたします。(弁理士、または代理人の氏名及び登録番号を明記のこと)

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith (list name and registration number)

Attorney	Reg. No.
Patrick G. Burns	29,367
Roger D. Greer	26,174
Lawrence J. Crain	31,497
Steven P. Fallon	35,132

Attorney	Reg. No.
James K. Folker	37,538
Jonathan D. Feuchtwang	41,017
B. Joe Kim	41,895
Joel H. Bootzin	42,343

直接電話連絡先: (名前及び電話番号)

Send Correspondence to:

Direct Telephone Calls to: (name and telephone number)

Patrick G. Burns, Esq.
Greer, Burns & Crain, Ltd.
Sears Tower - Suite 8660
Chicago, IL 60606 (312) 993-0080

唯一または第一発明者名

Full name of sole or first inventor

Yu MINAKUCHI

発明者の署名

日付

Inventor's signature

Date

Yu Minakuchi

Feb. 22, 2000

住所

Residence

Kanagawa, Japan

国籍

Citizenship

Japanese

私書箱

Post Office Address

c/o FUJITSU LIMITED
1-1, Kamikodanaka 4-chome,
Nakahara-ku, Kawasaki-shi,
Kanagawa 211-8588 Japan

第二共同発明者

Full name of second joint inventor, if any

Mitsuru OSAWA

第二共同発明者

日付

Second inventor's signature

Date

Mitsuru Osaawa

Feb. 22, 2000

住所

Residence

Kanagawa, Japan

国籍

Citizenship

Japanese

私書箱

Post Office Address

c/o FUJITSU LIMITED
1-1, Kamikodanaka 4-chome,
Nakahara-ku, Kawasaki-shi,
Kanagawa 211-8588 Japan

(第三以降の共同発明者についても同様に記載し、署名をすること)

(Supply similar information and signature for third and subsequent joint inventors.)

